


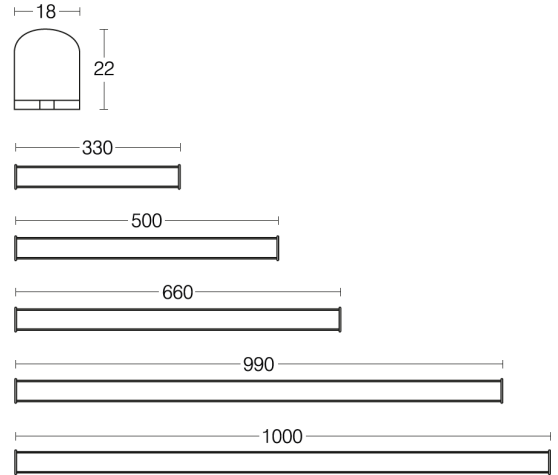

APPLICATION

LED high-performance linear lights with 120 degree beam light distribution.

PRODUCT DESCRIPTION

Linear lights made of anodised silver aluminium extruded housing with stainless steel screws and silicone sealing.
Mounting bracket made of plastic.
LED chip angle 120° (without lens)
Colour standard : Mat anodized
Constant current
Input 24V - DC Mono Color
Power factor > 90% full load
DALI controllable (optional)
0-10V / 1-10V controllable (optional)
Protection class IP65
Operation temperature -25°C / +55°C
Weight: 0,3 kg

LAMPS

Module connected wattage 15W
Luminaire connected wattage 20W
Ambient temperature t^a max = 55 °C

NW

Module designation 15L20230NC-33
Colour temperature 4000K
Colour rendering index $R^a > 80$
Module luminous flux 1680 lm
Luminaire luminous flux 1250 lm

WW

Module designation 15L20230NC-33
Colour temperature 3000K
Colour rendering index $R^a > 80$
Module luminous flux 1540 lm
Luminaire luminous flux 1100 lm

Complies with European standards
EN 60598 and CE certificate.

CE -- Conformity mark.

Standard colour temperature 4000K
Also available with 3000K on request.