ARSEN AC 120 31W

BAYLED[®]


WALLWASHER









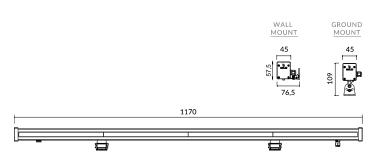

Mechanical and Housing

PRODUCT DATA

General Information		
Number of light source	120 pcs	
LED module	Mid Power LED's on alu-PCB	
Light distribution	18°- 25°- 30°x90°- 60°x110°- 90°x110°	
Light source colour	3000K-4000K	
Number of gear unit	1 unit	
Driver / power unit	PS (Constant current)	
Driver included	Yes	
Optical cover / lens type	Multi lens	
Control interface	On/Off	
Connection	-	
Cable	3x1,5 mm ²	
Protection class IEC	Safety class I	
CE mark	CE mark	
ENEC mark	-	
Warranty period	5 years	
Optic type	Symmetric - asymmetric	
EU RoHS compliant	Yes	
Light source engine type	LED	
LDT / IES photometric file	Available	
Life span	Estimated average 50.000 hours	
MacAdams	CCT tolerance within a 3 step MacAdams ellipse	
Product code	01-07-120-31-XX-X (XX: Lens angle, X: Led colo	

Operating and Electric	e <mark>al</mark>
Input Voltage	198-264 V AC
Input frequency	50 to 60 Hz
Inrush current	141 mA
Power factor (min.)	0.92

Control and Dimming	
Dimmable(optional)	1-10V - DALI
DMX	-

Housing material	Aluminium extrusion
Gasket	Silicone
Optic material	PMMA
Optical cover / lens material	Glass (5mm)
Fixation material	Aluminium and plastic mounting bracket
Mounting device	-
Effective projected area	0,07m ²
Colour	Grey
Dimensions (height x width x depth)	58 x 1170 x 77 mm
Approval and Application	
Ingress protection code	IP66
Mech. impact protection code	IK09
Surge protection (common/differential)	2 KV/1KV
Initial Performance (IEC Compliar	nt)
Module luminous flux	5602 lm (4000K) / 5275 lm (3000K)
Luminaire luminous flux	5154 lm (4000K) / 4853 lm (3000K)
LED luminaire efficiency	166 lm (4000K) / 157 lm (3000K)
Colour Temperature	4000K / 3000K
	6500K also available up on request.
Colour rendering index	>70
Rated LED power	28W
Rated luminare power	31W
Application Conditions	
Ambient temperature range	-25°C to +55°C
Maximum dimming level	-
Net weight (piece)	2,2 kg
Fixture Run Length	To calculate fixture run lenghts and to
•	

power consumption for your specific installation, please ask to company assistant

