



GALENA DATA SHEET

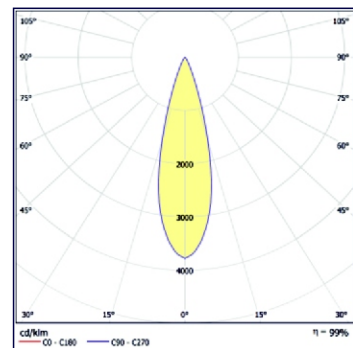

GALENA DATA SHEET

TR		EN	
Ürün Tipi	5W 20 x Mid-Power LED	Product Type	5W 20 x Mid-Power LEDs
Led Türü	Power LED / Mid Power Yüksek verimli (Nichia) LEDler 3000K, 4000K, 5000K, 6500K CCT toleransı ile 3-step MacAdams elipse ve LM80 uygunluğu	Led Type	Power LED / Mid Power High efficiency (Nichia) LEDs, available in 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant
Giriş Voltajı	170V - 240V AC / 50-60Hz	Input Voltage	170V - 240V AC / 50-60Hz
CRI	Ra > 80	CRI	Ra > 80
Led Renkleri	Beyaz, Ilık Beyaz, Naturel Beyaz	Led Colors	White ,Warm White, Natural White
Lümen (lm)	5W (CW = 700 / NW = 600 / WW = 550)	Light Output (lm)	5W (CW = 700 / NW = 600 / WW = 550)
Ölçü (mm)	L:240mm - W: 80mm - H: 55mm	Dimensions (mm)	L:240mm - W: 80mm - H: 55mm
Ağırlık (Kg)	1.3 kg	Weight (Kg)	1.3 kg
Materyal	Elektrostatik toz boyalı alüminyum enjeksiyon gövde, paslanmaz çelik civatalar, paslanmaz çelik çerçeve. Gömme kutusu içerir.	Materials	Powder coated die cast aluminium housing with stainless steel screws and silicone rubber gaskets, Includes recessing box.
Cam	Opak difüzör	Glass	Opaque diffuser
Güç Kaynağı	Yüksek verimli sabit akım güç kaynağı	Power Supply	Constant current
Çalışma Sıcaklığı	-25°C / +45°C	Operation Temperature	-25°C / +45°C
Koruma Sınıfı	IP67	Insulation Class	IP 67
Elektrik Sınıfı	Class I	Electrical Class	Class I
Uygunluk	EN60598-1:2009-04	Conformity	EN60598-1:2009-04

