


SIRUS STL DATA SHEET



SIRUS STL DATA SHEET

TR		EN	
Ürün Tipi	Sirus STL 50W 32 - 96 Led Sirus STL 70W 32 - 96 Led Sirus STL 100W 32 - 96 Led Sirus STL 120W 32 - 96 Led	Product Type	Sirus STL 50W 32 - 96 Led Sirus STL 70W 32 - 96 Led Sirus STL 100W 32 - 96 Led Sirus STL 120W 32 - 96 Led
Led Türü	Power LED / Mid Power Yüksek verimli LEDler 3000K 4000K, 5000K, 6500K CCT toleransı ile 3-step MacAdams ellipse ve LM80 uygunluğu	Led Type	Power LED / Mid Power High efficiency LEDs, available in 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant
Giriş Voltajı	100V - 240V AC / 50-60Hz	Input Voltage	100V - 240V AC / 50-60Hz
CRI	Ra > 80	CRI	Ra > 80
Led Renkleri	Beyaz, Ilık Beyaz, Naturel Beyaz	Led Colors	White ,Warm White, Natural White
Lümen (lm)	50 W (CW: 4800 Lm - NW: 4416 Lm - WW: 4320Lm) 70 W (CW: 6300 Lm - NW: 5796 Lm - WW: 5670Lm) 100 W (CW:12160 Lm - NW:11200 Lm - WW:10944Lm) 120 W (CW:14000 Lm - NW:12400 Lm - WW:11520Lm)	Light Output (lm)	50 W (CW: 4800 Lm - NW: 4416 Lm - WW: 4320Lm) 70 W (CW: 6300 Lm - NW: 5796 Lm - WW: 5670Lm) 100 W (CW:12160 Lm - NW:11200 Lm - WW:10944Lm) 120 W (CW:14000 Lm - NW:12400 Lm - WW:11520Lm)
Lens Dereceleri	135° x 50°	Optics	135° x 50°
Ölçü (mm)	W: 65mm - L:300mm - H: 450mm	Dimensions (mm)	W: 65mm - L:300mm - H: 450mm
Ağırlık (Kg)	6.00 kg	Weight (Kg)	6.00 kg
Materyal	Elektrostatik toz boyalı alüminyum enjeksiyon gövde, paslanmaz çelik civatalar.	Materials	Powder coated die cast aluminium housing with stainless steel screws.
Difüzör	5mm temperli cam	Diffuser	5mm temperli cam
Kontrol Sistemleri	1-10V DIM, DALI	Control Systems	1-10V DIM, DALI
Güç Kaynağı	Yüksek verimli sabit akım güç kaynağı	Power Supply	Constant current
Çalışma Sıcaklığı	-25°C / +45°C	Operation Temperature	-25°C / +45°C
Koruma Sınıfı	IP66	Insulation Class	IP 66
Darbe Direnci	IK 09	Impact Resistance	IK 09
Elektrik Sınıfı	Class II	Electrical Class	Class II
Uygunluk	EN60598-2-3:2009-04	Conformity	EN60598-2-3:2009-04

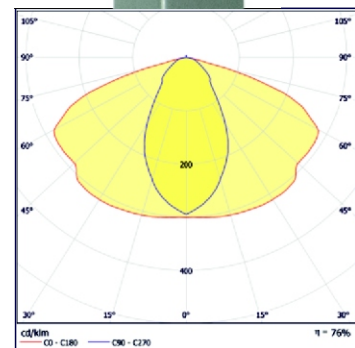