27/01/2019

WALLWASHER VEGA 100CM 72W IP66 IK08 EN60598 CE

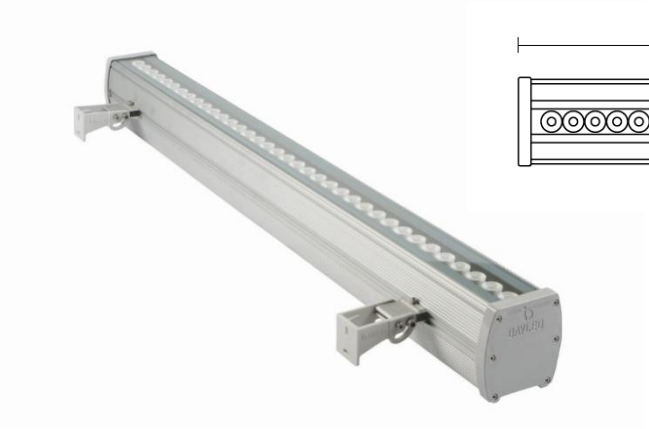

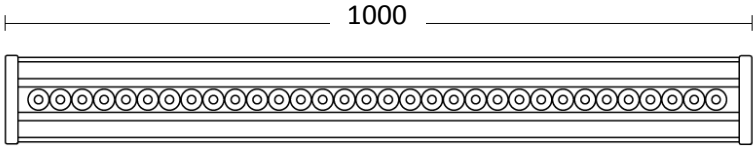



APPLICATION
LED high-performance wallwashers with wide & narrow beam light distribution.

PRODUCT DESCRIPTION
Wallwasher made of aluminium alloy, Aluminium and stainless steel.
Clear 5mm safety glass
Silicon rubber gasket
Swivel range 95°
Mounting bracket made of plastic.
Lens angle 8°- 25°- 45°- 60°- 10°x45°
Colour standard : Mat anodizied
Optional RAL codes.
LED power supply unit
Input 110 – 240V AC 50 / 60 Hz
Power factor > 90% full load
DALI controllable (optional)
0-10V / 1-10V controllable (optional)
Safety class I
Protection class IP66
Impact strenght IK08
Operation temperature -25°C / +55°C
Wind catching area: 0,14 m^2
Weight: 4,84 kg
EULUMDAT files available
Complies with European standards EN 60598 and CE certificate.
CE -- Conformity mark.

LAMPS

Module connected wattage	72W
Luminaire connected wattage	75W
Ambient temperature	tª max = 55 °C

NW

Module designation	15L30320NC-36
Colour temperature	4000K
Colour rendering index	Rª>80
Module luminous flux	10440 lm
Luminaire luminous flux	8856 lm
Luminaire luminous efficiency	123 lm / W

WW

Module designation	15L30320NC-36
Colour temperature	3000K
Colour rendering index	Rª>80
Module luminous flux	10080 lm
Luminaire luminous flux	8424 lm
Luminaire luminous efficiency	117 lm / W

Standard colour temperature 4000K
Also available with 3000K on request.

BAYLED TEKNOLOJİ A.Ş.
Ahi Evran Mah. 225. Cad. No:84
06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35
F: +90 312 395 73 65
info@bayled.com.tr

Bayled All right reserved

We reserve the right to change specifications without prior written notice.
Edition: 03.05.2016
Current version under:
www.bayled.com.tr
Bayled is a Baytaş group brand.