


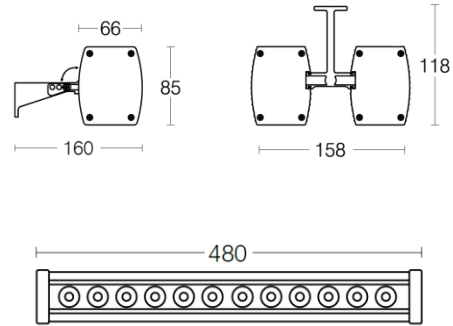

APPLICATION

LED high-performance wallwashers with wide & narrow beam light distribution.

PRODUCT DESCRIPTION

Wallwasher made of aluminium extrusion, Aluminium and stainless steel.

Clear 5mm safety glass

Silicon rubber gasket

Swivel range 95°

Mounting bracket made of plastic.

Lens angle 8°- 25°- 45°- 60°- 10°x45°

Colour standard : Mat anodized

Optional RAL codes.

LED power supply unit

Input 110 – 240V AC 50 / 60 Hz

Power factor > 90% full load

DALI controllable (optional)

0-10V / 1-10V controllable (optional)

Safety class I

Protection class IP66

Impact strenght IK09

Operation temperature -25°C / +55°C

Wind catching area: 0,08 m²

Weight: 1,8 kg

EULUMDAT files available

Complies with European standards

EN 60598 and CE certificate.

CE -- Conformity mark.

LAMPS

Module connected wattage 12W

Luminaire connected wattage 18W

Ambient temperature t^a max = 55 °C

NW

Module designation 15L20230NC-12

Colour temperature 4000K

Colour rendering index R^a>80

Module luminous flux 1740 lm

Luminaire luminous flux 1476 lm

Luminaire luminous efficiency 123 lm / W

WW

Module designation 15L20230NC-12

Colour temperature 3000K

Colour rendering index R^a>80

Module luminous flux 1680 lm

Luminaire luminous flux 1404 lm

Luminaire luminous efficiency 117 lm / W

Standard colour temperature 4000K

Also available with 3000K on request.