


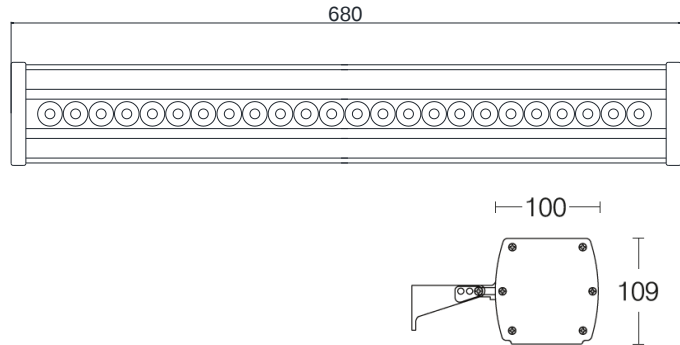

APPLICATION

LED high-performance wallwashers with wide & narrow beam light distribution.

PRODUCT DESCRIPTION

Wallwasher made of aluminium alloy,
Aluminium and stainless steel.
Clear 5mm safety glass
Silicon rubber gasket
Swivel range 95°
Mounting bracket made of plastic.
Lens angle 8°- 25°- 45°- 60°
Colour standard : Mat anodized
Optional RAL codes.
LED power supply unit
Input 110 – 240V AC 50 / 60 Hz
Power factor > 90% full load
DALI controllable (optional)
0-10V / 1-10V controllable (optional)
Safety class I
Protection class IP66
Impact strenght IK08
Operation temperature -25°C / +55°C
Wind catching area: 0,14 m²
Weight: 3,53 kg
EULUMDAT files available
Complies with European standards
EN 60598 and CE certificate.
CE -- Conformity mark.

LAMPS

Module connected wattage 24W
Luminaire connected wattage 36W
Rated temperature $t^a = 25^{\circ}\text{C}$
Ambient temperature $t^a \text{ max} = 35^{\circ}\text{C}$
If the power is reduced, the max ambient temperature will increase. To min. 55°C

NW

Module designation 15L30320NC-24
Colour temperature 4000K
Colour rendering index $R^a > 80$
Module luminous flux 3480 lm
Luminaire luminous flux 2952 lm
Luminaire luminous efficiency 123 lm / W

WW

Module designation 15L30320NC-24
Colour temperature 3000K
Colour rendering index $R^a > 80$
Module luminous flux 3360 lm
Luminaire luminous flux 2808 lm
Luminaire luminous efficiency 117 lm / W

Standard colour temperature 4000K

Also available with 3000K on request.