


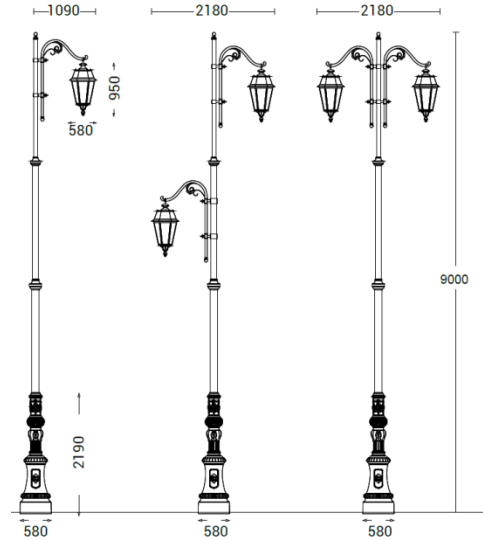

APPLICATION

HPS high-performance decorative lights
With wide beam light distribution

PRODUCT DESCRIPTION

Body pole steel with electro galvanized
Diffuser 5mm polycarbon glass
Silicon rubber gasket
Mounting detail anchor system
All decorative parts, Base and Bracket
manufactured cast aluminium
All RAL Codes or
Special architectural paints
Ballast Magnetic (Standart) / Electronic
High pressure electrical system
Input 170 – 240V AC 50 / 60 Hz
Power factor > 90% full load
Safety class II
Protection class IP65
Operation temperature -25°C / +55°C
EULUMDAT files available
Complies with European standards
EN 60598 and CE certificate.
CE -- Conformity mark.

LAMPS

Module connected wattage 150W
Luminaire connected wattage 180W
Ambient temperature t^a max = 55 °C

NW

Colour temperature 4000K
Colour rendering index $R^a > 80$
Luminaire luminous flux 15000 lm
Luminaire luminous efficiency 100 lm / W

WW

Colour temperature 3000K
Colour rendering index $R^a > 80$
Luminaire luminous flux 14250 lm
Luminaire luminous efficiency 95 lm / W

Standard colour temperature 4000K

Also available with 3000K on request.