11/01/2019

HIGHBAY TETRA HBL-22 460W IP66 IK09 EN60598 CE

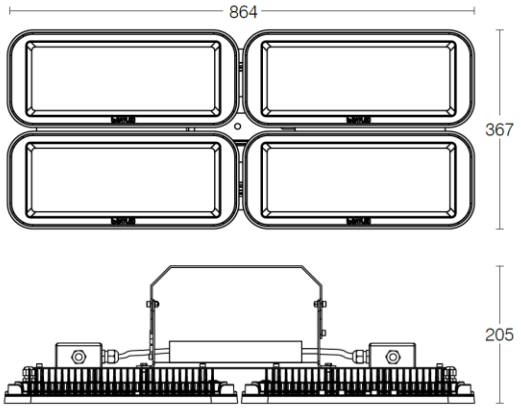

APPLICATION
LED high-performance High-Bays with wide & narrow beam light distribution.

PRODUCT DESCRIPTION
High-Bays made of aluminium die cast, Aluminium and stainless steel.
Clear 5mm safety glass
Silicon rubber gasket
Mounting bracket made of steel with Electrostatic powder coating.
Lens angle 30°- 40°- 60°- 90°
Colour standard MT-X6-23
Optional RAL codes.
LED power supply unit
Input 100 – 305V AC 50 / 60 Hz
Power factor > 90% full load
6kV surge protection
DALI controllable (optional)
0-10V / 1-10V controllable (optional)
Safety class I
Protection class IP66
Impact strenght IK09
Operation temperature -25°C / +55°C
Wind catching area: 0,32 m^2
Weight: 23 kg
EULUMDAT files available
Complies with European standards EN 60598 and CE certificate.
CE -- Conformity mark.

LAMPS

Module connected wattage	460W
Luminaire connected wattage	480W
Ambient temperature	tª max = 55°C

NW

Module designation	10S109344NC-512
Colour temperature	4000K
Colour rendering index	Rª>80
Module luminous flux	66700 lm
Luminaire luminous flux	56580 lm
Luminaire luminous efficiency	123 lm / W

WW

Module designation	10S109344NC-512
Colour temperature	3000K
Colour rendering index	Rª>80
Module luminous flux	64400 lm
Luminaire luminous flux	53820 lm
Luminaire luminous efficiency	117 lm / W

Standard colour temperature 4000K
Also available with 3000K on request.

BAYLED TEKNOLOJİ A.Ş.
Ahi Evran Mah. 225. Cad. No:84
06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35
F: +90 312 395 73 65
info@bayled.com.tr

Bayled All right reserved

We reserve the right to change specifications without prior written notice.
Edition: 03.05.2016
Current version under:
www.bayled.com.tr
Bayled is a Baytaş group brand.