

APPLICATION

LED high-performance Waterproof with wide beam light distribution.

PRODUCT DESCRIPTION

Waterproof made of Polycarbon and Aluminium profile. Stainless Steel and Polycarbon lids. Silicon rubber gasket IP66 connector Mounting bracket made of stainless steel 1 mm stainless steel rope (optional) LED chip angle 120°(without lens) LED power supply unit Input 220 – 240V AC 50 / 60 Hz Power factor > 96% full load 2kV surge protection DALI controllable (optional) 0-10V controllable (optional) Safety class I Protection class IP66 Impact strenght IK10 Operation temperature -25°C / +55°C Wind catching area: 0,13 m² Weight: 4.83 kg EULUMDAT files available Complies with European standards EN 60598 and CE certificate. **CE** -- Conformity mark.

LAMPS


Module connected wattage 140W
Luminaire connected wattage 160W
Ambient temperature t^a max = 55 °C

CW (6500K)

Module designation 15S32590NC-384
Colour temperature 6500K
Colour rendering index R^a>80
Module luminous flux 22528 lm
Luminaire luminous flux 18924 lm
Luminaire luminous efficiency 135 lm / W

Standard colour temperature 6500K
Also available with 4000K on request.

Mounting Details

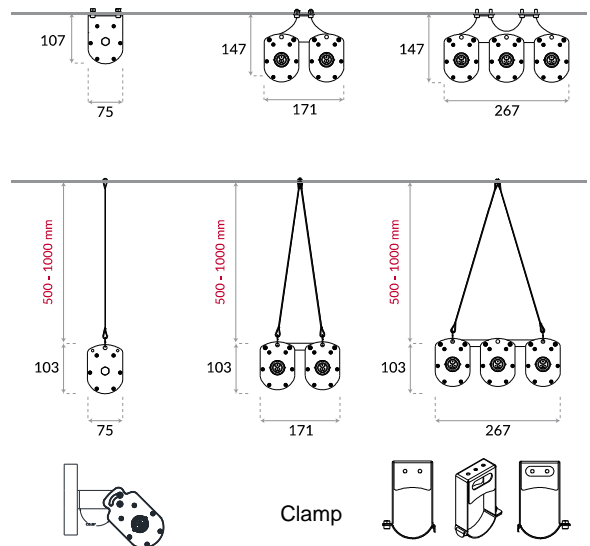

BAYLED TEKNOLOJİ A.Ş.

Ahi Evran Mah. 225. Cad. No:84
06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35
F: +90 312 395 73 65
info@bayled.com.tr

Bayled All right reserved

We reserve the right to change specifications without prior written notice.
Edition: 03.05.2016
Current version under:
www.bayled.com.tr
Bayled is a Baytaş group brand.