

### APPLICATION

LED high-performance Waterproof with wide beam light distribution.

### PRODUCT DESCRIPTION

Waterproof made of Polycarbon and Aluminium profile.  
Stainless Steel and Polycarbon lids.  
Silicon rubber gasket  
IP66 connector  
Mounting bracket made of stainless steel  
1 mm stainless steel rope (optional)  
LED chip angle 120°(without lens)  
LED power supply unit  
Input 220 – 240V AC 50 / 60 Hz  
Power factor > 96% full load  
2kV surge protection  
DALI controllable (optional)  
0-10V controllable (optional)  
Safety class I  
Protection class IP66  
Impact strenght IK10  
Operation temperature -25°C / +55°C  
Wind catching area: 0,07 m<sup>2</sup>  
Weight: 2,79 kg  
EULUMDAT files available  
Complies with European standards EN 60598 and CE certificate.  
CE -- Conformity mark.

### LAMPS


Module connected wattage 50W  
Luminaire connected wattage 60W  
Ambient temperature t<sup>a</sup> max = 55 °C

### CW (6500K)

Module designation 15S32590NC-192  
Colour temperature 6500K  
Colour rendering index R<sup>a</sup>>80  
Module luminous flux 8540 lm  
Luminaire luminous flux 7172 lm  
Luminaire luminous efficiency 143 lm / W

**Standard colour temperature 6500K**  
**Also available with 4000K on request.**

### Mounting Details

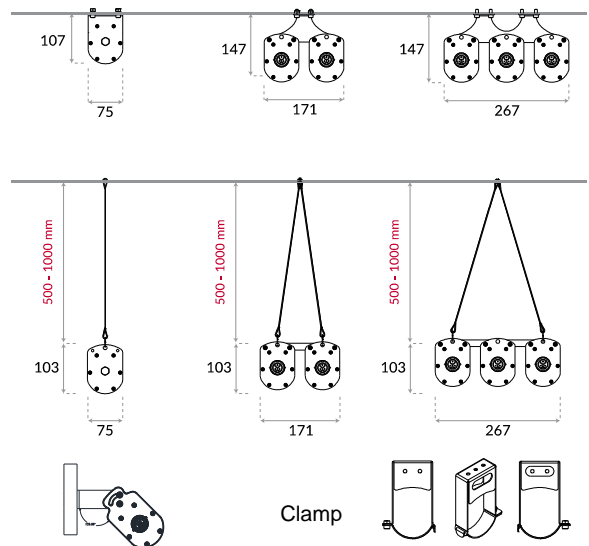

### BAYLED TEKNOLOJİ A.Ş.

Ahi Evran Mah. 225. Cad. No:84  
06935, Sincan ANKARA / TURKEY  
T: +90 312 395 76 35  
F: +90 312 395 73 65  
info@bayled.com.tr

Bayled All right reserved

We reserve the right to change specifications without prior written notice.  
Edition: 03.05.2016  
Current version under:  
[www.bayled.com.tr](http://www.bayled.com.tr)  
Bayled is a Baytaş group brand.