


BAYLINE FULL RGB LOOP IN - LOOP OUT CONNECTION DIAGRAM

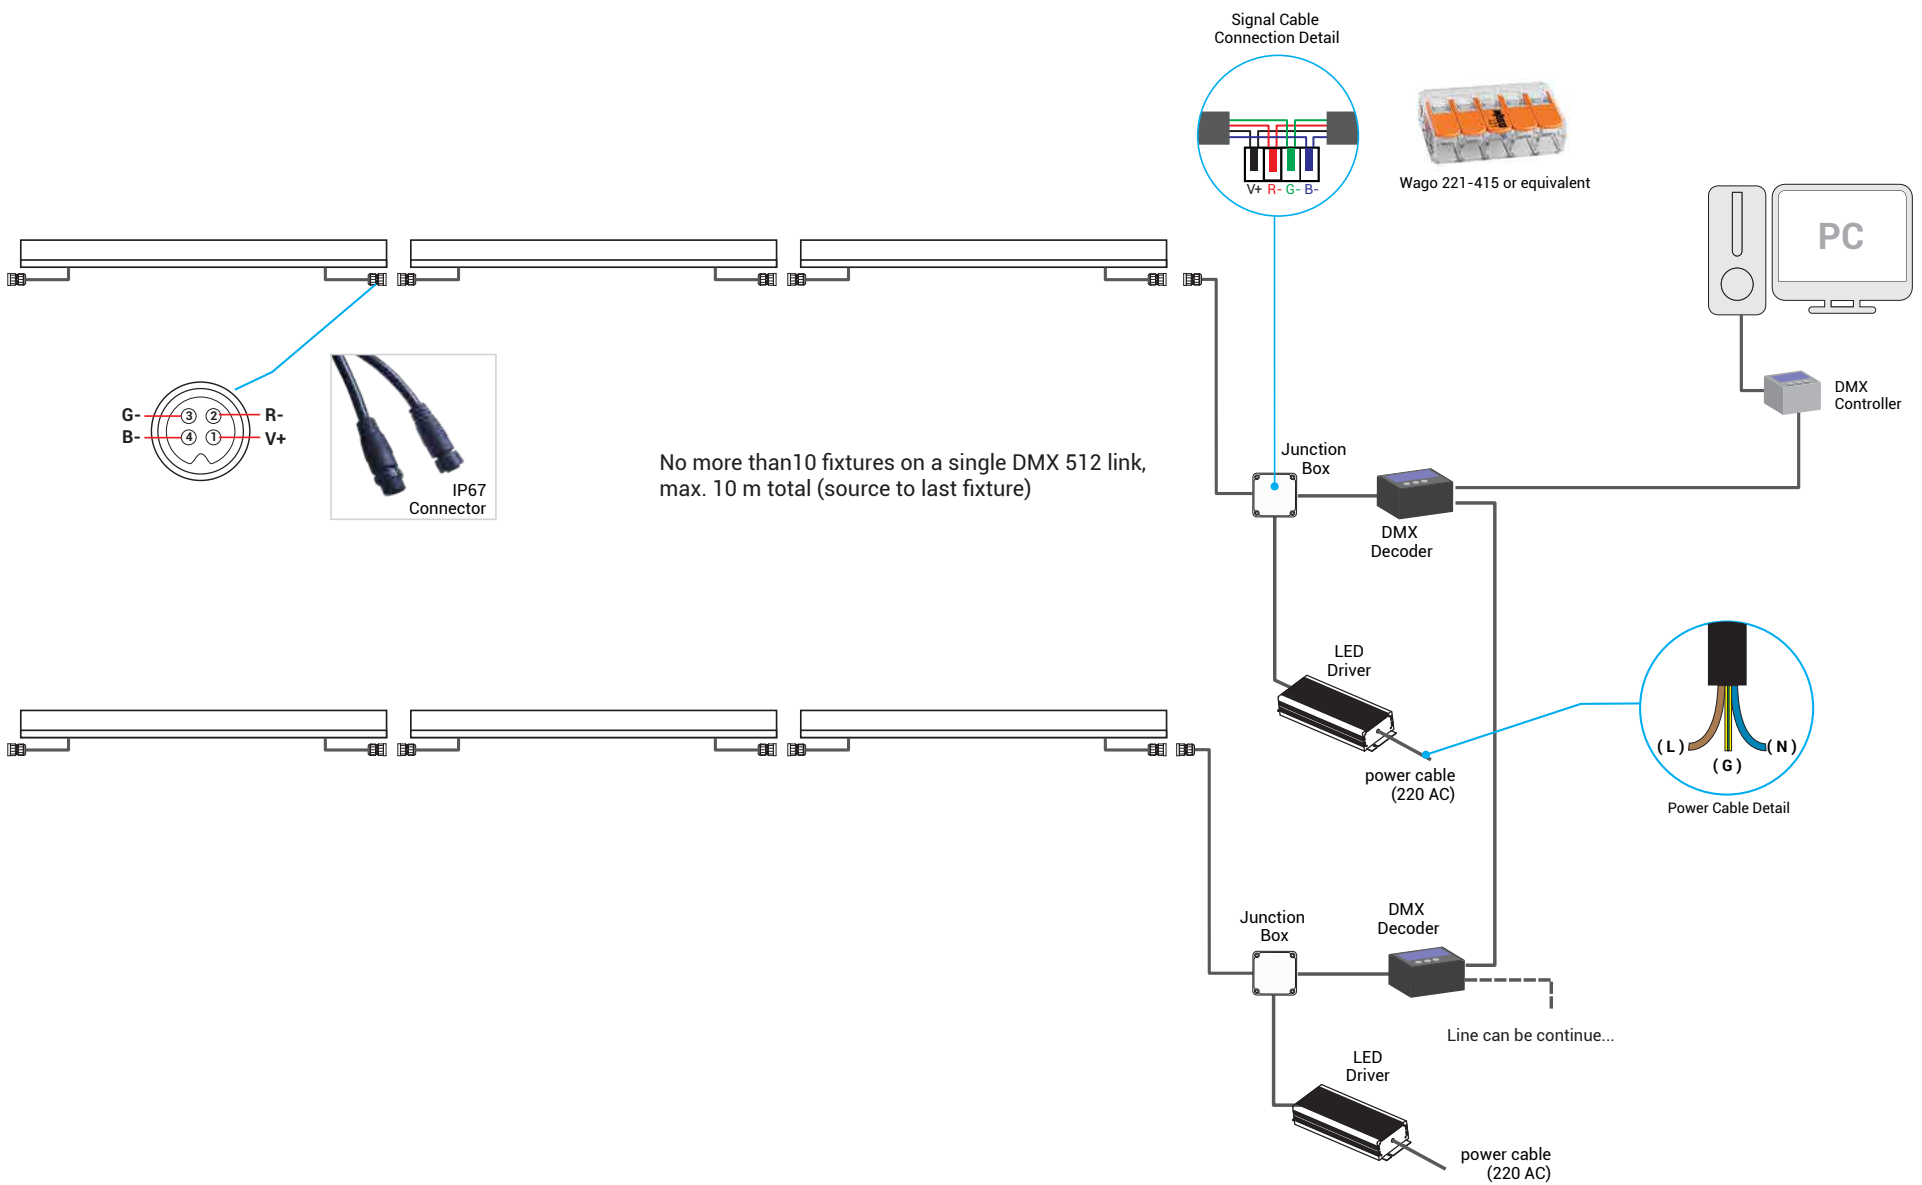

Data cabling from DMX source to first fixture and between subsequent BAYLINE fixtures shall be Cat5e UTP or higher (stranded type only) or other cable type suitable for DMX communication. Consult DMX standard for additional guidance.

*The signal cables must be connected color to color or (number to number) otherwise the product led colors will work asynchronous.