DMX512/RDM DECODER 23CH350

CONTROLLER

IP20 EN60598 CE

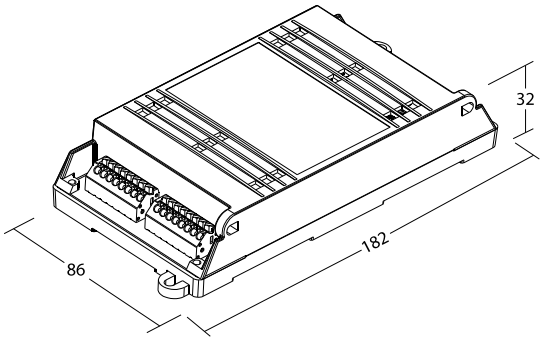

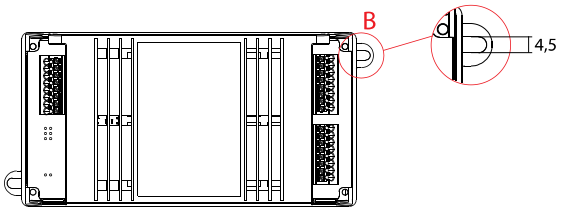

PRODUCT DATA

Input	
Voltage range	9 - 56VDC
Input current sum	2163mA
Output	
Voltage range	2 - 52VDC
Efficiency (max)	97% at full load and 36VDC/48VDC
Output channel	2x3 channel
Output current per ch.	350mA
Output current sum	2100mA
General Information	
Control interface	DMX512/RDM
Protection class IEC	Safety class I
CE mark	CE mark
Warranty period	5 years
EU RoHS compliant	Yes
Mechanical and Housing	
Housing material	Polycarbonate
Effective projected area	0,016m^2
Colour	White
Dimensions (height x width x depth)	86 x 182 x 32 mm
Application Conditions	
Ambient temperature range	-30°C to +85°C
Maximum dimming level	-
Net weight (piece)	0,27 kg

BAYLED TEKNOLOJİ A.Ş.
Ahi Evran Mah. 225. Cad. No:84 06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35 | F: +90 312 395 73 65 | sales@bayled.com.tr
Bayled is a Baytaş group brand.

Scan the QR Code to go to the product web page.

We reserve the right to change specifications without prior written notice.
Current version under: www.bayled.eu