




Dimensions (mm)

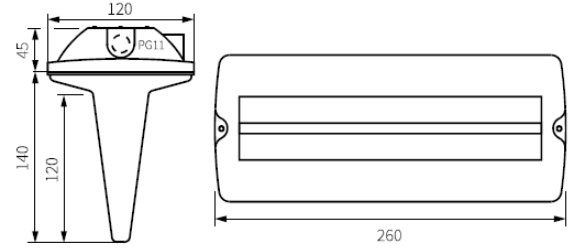

PRODUCT DATA

Application	Escape Sign
Mounting	Direct mounting to ceiling. Suspended recessed & flag mounting is available by accessory
Type	Manuel Test, Self Test, DALI, Wireless
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	24m. Single sided
Light Source	LED module, 12 mid power LEDs, 6500K, CRI>80
Battery	3.6V High temperature battery block, Ni-Cd/Ni-MH
Wiring	Up to 2x2,25mm ² quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing

PRODUCT CODE

Code	Type	Battery	Light Output & Duration
ELGD-SM8E	ECO	Ni-Cd	1 hour, 236Lm or 3 hours, 98Lm
ELGD-SM15E			1 hour, 390Lm or 3 hours, 184Lm
ELGD-SM15E-MH		Ni-MH	1 hour, 390Lm or 3 hours, 184Lm
ELGD-SM22E-MH			1 hour, 390Lm or 3 hours, 270Lm
ELGD-SM8-ST	SELF TEST	Ni-Cd	1 hour, 236Lm or 3 hours, 98Lm
ELGD-SM15-ST			1 hour, 390Lm or 3 hours, 184Lm
ELGD-SM15-ST-MH		Ni-MH	1 hour, 390Lm or 3 hours, 184Lm
ELGD-SM22-ST-MH			1 hour, 390Lm or 3 hours, 270Lm
ELGD-SM22-DALI	DALI	Ni-MH	3 hour, 172Lm
ELGD-1224	CENTRAL	24 Volt AC/DC	172Lm
ELGD-12230		230 Volt AC/DC	

VIEWING AREA

