


TETRA PRL-4 RGB (MOVABLE)

340W

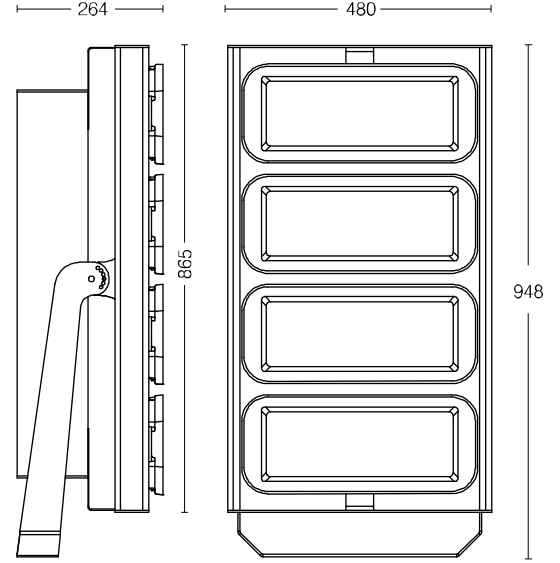

FLOODLIGHT

IP66**IK09****EN60598 CE**

PRODUCT DATA

General Information

Number of light source	192 pcs
LED module	High Power LED's on alu-PCB
Light distribution	8°- 15°- 40°- 60°- 90°
Light source colour	RGB
Number of gear unit	1 unit
Driver / power unit	PS (Constant voltage)
Driver included	Yes
Optical cover / lens type	Multi lens
Control interface	DMX
Connection	-
Cable	3x1,5 mm ² (Power)+ 3x0,5 mm ² (DMX)
Protection class IEC	Safety class I
CE mark	CE mark
ENEC mark	-
Warranty period	5 years
Optic type	Symmetric
EU RoHS compliant	Yes
Light source engine type	LED
LDT / IES photometric file	N/A
Life span	Estimated average 50.000 hours
MacAdams	CCT tolerance within a 3 step MacAdams ellipse
Product code	45-20-340-192-XX-RGB(XX: Lens angle, X: Led colour)

Operating and Electrical

Input Voltage	85-264 V AC
Input frequency	50 to 60 Hz
Inrush current	1546 mA
Power factor (min.)	0.92

Control and Dimming

Dimmable(optional)	-
DMX	DMX 512

Mechanical and Housing

Housing material	Aluminium die-cast
Gasket	Silicone
Optic material	PMMA
Optical cover / lens material	Glass (5mm)
Fixation material	Stainless steel
Mounting device	-
Effective projected area	0,46m ²
Colour	Grey
Dimensions (height x width x depth)	948 x 480 x 264 mm

Approval and Application

Ingress protection code	IP66
Mech. impact protection code	IK09
Surge protection (common/differential)	6 KV/4KV (optional)

Initial Performance (IEC Compliant)

Module luminous flux	19084 lm (RGB)
Luminaire luminous flux	17560 lm (RGB)
LED luminaire efficiency	52 lm (RGB)
Colour Temperature	RGB

Colour rendering index	≥70
Rated LED power	309W
Rated luminaire power	340W

Application Conditions

Ambient temperature range	-25°C to +55°C
Maximum dimming level	-
Net weight (piece)	30,4 kg

Fixture Run Length To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant

