


# SIRUS RGB 75W



## FLOODLIGHT

IP66 IK09 EN60598 CE

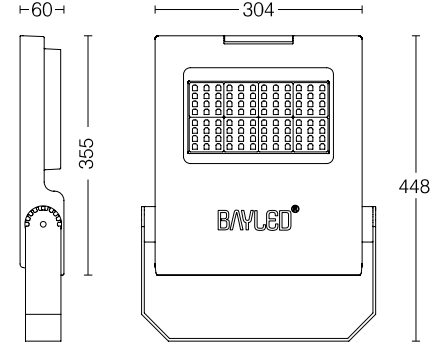

## PRODUCT DATA

### General Information

Number of light source	32 pcs
LED module	High Power LED's on alu-PCB
Light distribution	30°-60°-90°-ASYM
Light source colour	RGB
Number of gear unit	1 unit
Driver / power unit	PS (Constant current)
Driver included	Yes
Optical cover / lens type	Multi lens
Control interface	DMX
Connection	-
Cable	3x1,5 mm <sup>2</sup> (Power)+ 3x0,5mm <sup>2</sup> (DMX)
Protection class IEC	Safety class I
CE mark	CE mark
ENEC mark	-
Warranty period	5 years
Optic type	Symmetric - asymmetric
EU RoHS compliant	Yes
Light source engine type	LED
LDT / IES photometric file	N/A
Life span	Estimated average 50.000 hours
MacAdams	CCT tolerance within a 3 step MacAdams ellipse
Product code	45-06-85-32-XX-RGB (XX: Lens angle, X: Led colour)

### Operating and Electrical

Input Voltage	85-264 V AC
Input frequency	50 to 60 Hz
Inrush current	341 mA
Power factor (min.)	0.92

### Control and Dimming

Dimmable(optional)	-
DMX	DMX512

### Mechanical and Housing

Housing material	Aluminium die-cast
Gasket	Silicone
Optic material	PMMA
Optical cover / lens material	Glass (5mm)
Fixation material	Stainless steel
Mounting device	-
Effective projected area	0,14m <sup>2</sup>
Colour	Grey
Dimensions (height x width x depth)	448 x 304 x 60 mm

### Approval and Application

Ingress protection code	IP66
Mech. impact protection code	IK09
Surge protection (common/differential)	6 KV/4KV (optional)

### Initial Performance (IEC Compliant)

Module luminous flux	3334 lm (RGB)
Luminaire luminous flux	3067 lm (RGB)
LED luminaire efficiency	36 lm/W (RGB)
Colour Temperature	RGB
Colour rendering index	≥70
Rated LED power	67W
Rated luminaire power	75W

### Application Conditions

Ambient temperature range	-25°C to +55°C
Maximum dimming level	-
Net weight (piece)	6.8 kg

### Fixture Run Length

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant

#### BAYLED TEKNOLOJİ A.Ş.

Ahi Evran Mah. 225. Cad. No:84 06935, Sincan ANKARA / TURKEY  
T: +90 312 395 76 35 | F: +90 312 395 73 65 | sales@bayled.com.tr

Bayled is a Baytaş group brand.

Scan the QR Code to go to the product web page.



We reserve the right to change specifications without prior written notice.

Current version under: [www.bayled.eu](http://www.bayled.eu)