



Purchase Order Table



CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
15-02-009-XX-X	8W	9W	1240lm - 1305lm	756lm - 796lm	3000K-4000K
15-02-015-XX-X	14W	15W	1821lm - 1916lm	1111lm - 1169lm	3000K-4000K

XX : Lens Angle, X : Led Color


Standard color temperature 4000K, also available with 6500K on request.

TITUS

EN 60598 | IK09 | IP67 | CE

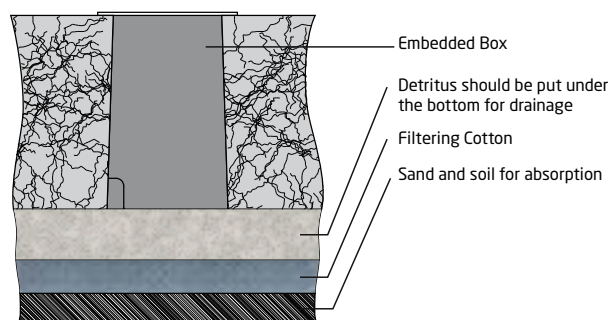

Photometric Curves

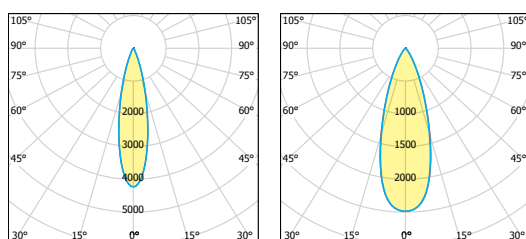

Technical Specifications

Inground made of aluminium die cast

Aluminium and stainless steel

Clear 6mm safety glass

Silicon base seal gasket

Mounting bracket made of plastic

Electrostatic powder coating

Lens angle 30°-50° (9 in 1 full lens)

Color standard 7040, optional RAL codes

Input 90 - 264V AC 50 / 60 Hz

Power factor (min.) 0.92

Mono color (Standard)

DALI controllable (Optional)

0-10V / 1-10V controllable (Optional)

DMX 512 (Optional), RF (Optional)

Safety Class I

Protection Class IP67

Impact strength IK09

Operation temperature -25°C / +55°C

Weight: 2 kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

