



Purchase Order Table



CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
15-01-003-XX-X	4W	4W	226lm - 242lm	205lm - 220lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.




ASPEN

EN 60598 | IK09 | IP67 | CE

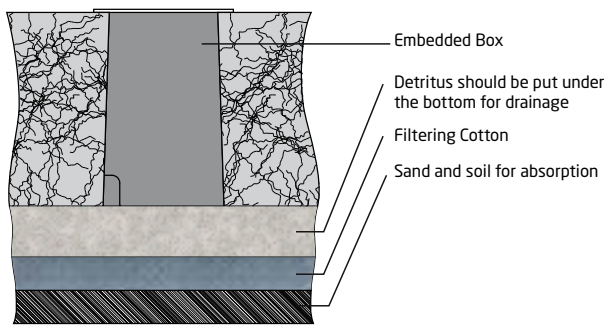

Photometric Curves

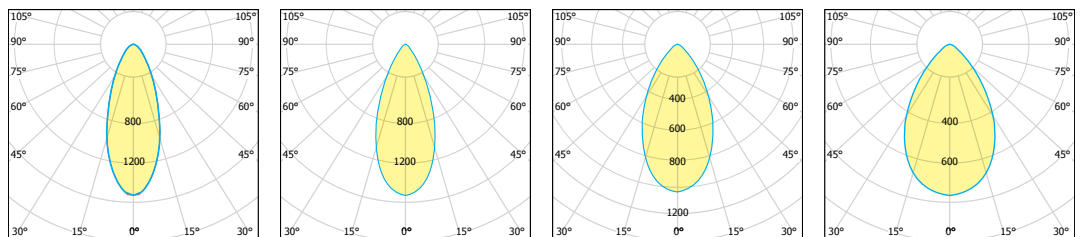

Technical Specifications

Inground made of aluminium die cast
 Aluminium and stainless steel
 Clear 6mm safety glass
 Silicon base seal gasket
 Mounting bracket made of plastic
 Electrostatic powder coating
 Lens angle 25°-40°-60°-80°
 Color standard 7040, optional RAL codes
 Input 100-240V AC 50 / 60 Hz
 Power factor (min.) 0.92

Mono color (Standard)
 DALI controllable (Optional) (External)
 0-10V / 1-10V controllable (Optional) (External)
 Safety Class I
 Protection Class IP67
 Impact strength IK09
 Operation temperature -25°C / +55°C
 Weight: 0,75 kg
 Complies with European standards
 EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

