





Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
15-03-18-XX-X	16W	18W	2273lm - 2392lm	2046lm - 2152lm	3000K-4000K
15-03-25-XX-X	23W	25W	2924lm - 3077lm	2631lm - 2769lm	3000K-4000K


XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

COSMO

EN 60598 | IK09 | IP67 | CE

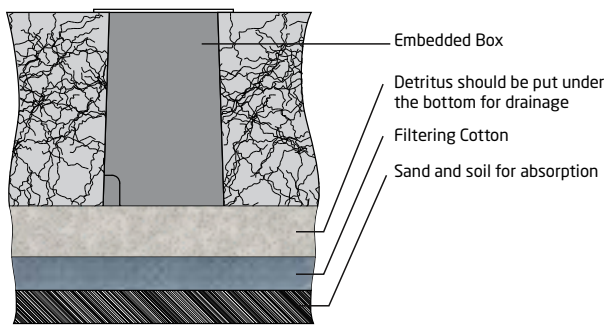

Photometric Curves

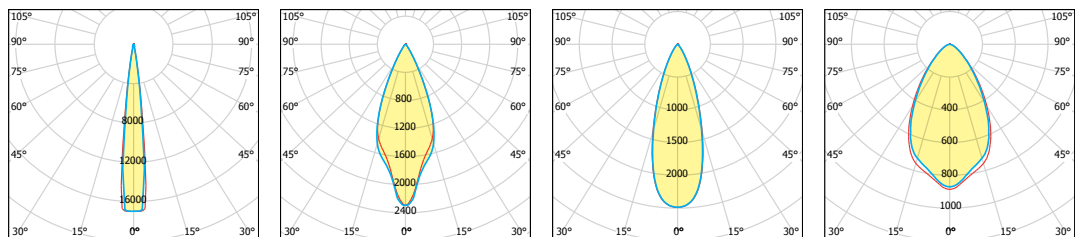

Technical Specifications

Inground made of aluminium die cast	DALI controllable (Optional)
Aluminium and stainless steel	0-10V / 1-10V controllable (Optional)
Clear 6mm safety glass	DMX 512 (Optional)
Silicon base seal gasket	RF (Optional)
Mounting bracket made of plastic	Safety Class I
Electrostatic powder coating	Protection Class IP67
Lens angle 8°-25°-45°-60°	Impact strength IK09
Color standard 7040, optional RAL codes	Operation temperature -25°C / +55°C
Input 90 -264V AC 50 / 60 Hz	Weight: 2,50 kg
Power factor (min.) 0.92	Complies with European standards
Mono color (Standard)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

