





Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
15-05-01-01-XX-X	1W	1W	99lm - 103lm	90lm - 94lm	3000K-4000K
15-05-01-03-XX-X	3W	3W	267lm - 281lm	243lm - 255lm	3000K-4000K





XX : Lens Angle, X : Led Color  
 Standard color temperature 4000K, also available with 6500K on request.

# ANKA

EN 60598 | IK09 | IP67 | CE

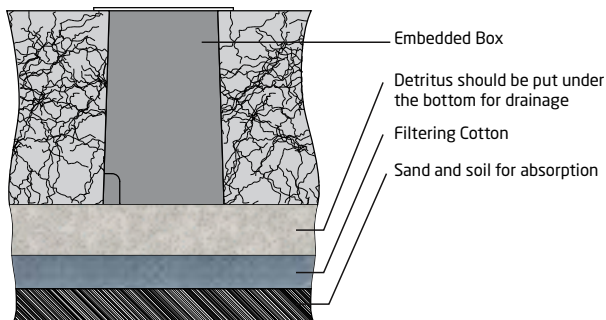

## Photometric Curves



## Technical Specifications

- Inground made of aluminium die cast
- Aluminium and stainless steel
- Clear 6mm safety glass
- Silicon base seal gasket
- Mounting bracket made of plastic
- Electrostatic powder coating
- Lens angle 8°-15° -25°-36°-60°
- Color standard 7040, optional RAL codes
- Input 198-264V AC 50 / 60 Hz
- Power factor (min.) 0.92

- Mono color (Standard)
- DALI controllable (Optional)(External)
- 0-10V / 1-10V controllable (Optional) (External)
- Safety Class I
- Protection Class IP67
- Impact strength IK09
- Operation temperature -25°C / +55°C
- Weight: 0,47 kg
- Complies with European standards
- EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

