




Purchase Order Table

CODE	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
6	6W/m	384lm-444lm	3000K-4000K
10	10W/m	691lm-709lm	3000K-4000K
14	14W/m	964lm-986lm	3000K-4000K



Standard color temperature 4000K, also available with 6500K on request.

LED BAR 3

EN 60598 | IP66 | CE

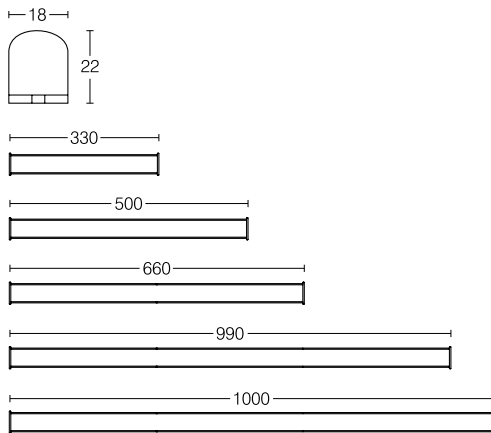

Photometric Curves



Technical Specifications

Linear lights made of aluminium extrusion	0-10V / 1-10V controllable (Optional)
Clear - Opal polycarbon diffuser (Optional)	RGB PWM signal with RC (Optional)
Color standard mat anodizing	DMX 512 (Optional)
Input 12V DC	Safety Class II
Power factor (min.) 0.92	Protection Class IP66
Diffuser angle 120°	Operation temperature -25°C / +55°C
Mono color (Standard)	Complies with European standards
DALI controllable (Optional)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

