



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-03-18-XX-X	16W	18W	2273lm - 2392lm	2046lm - 2152lm	3000K-4000K
20-03-25-XX-X	23W	25W	2924lm - 3077lm	2631lm - 2769lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.








RIO

EN 60598 | IP66 | CE

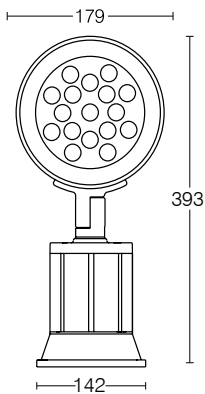

Photometric Curves



Technical Specifications

- Floodlight made of aluminium die cast
- Aluminium and stainless steel fittings
- Clear 3mm polycarbon glass
- Silicon base seal gasket
- Mounting bracket made of plastic
- Electrostatic powder coating
- Lens angle 8°-25°-45°-60°
- Color standard 7040, optional RAL codes
- Input 90 -264V AC 50 / 60 Hz
- Power factor (min.) 0.92

- Mono color (Standard)
- DALI controllable (optional)
- 0-10V / 1-10V controllable (optional)
- Safety Class I
- Protection Class IP66
- Operation temperature -25°C / +55°C
- Weight: 2,23 kg
- Complies with European standards
- EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

