



### Purchase Order Table


| CODE           | MODULE POWER | LUMINAIRE POWER | MODULE LUMINOUS FLUX | LUMINAIRE LUMINOUS FLUX | COLOR TEMPERATURE |
|----------------|--------------|-----------------|----------------------|-------------------------|-------------------|
| 20-04-001-XX-X | 1W           | 1W              | 99lm - 103lm         | 90lm - 94lm             | 3000K-4000K       |
| 20-04-003-XX-X | 3W           | 3W              | 267lm - 281lm        | 243lm - 255lm           | 3000K-4000K       |

XX : Lens Angle, X : Led Color

Standard color temperature 4000K, also available with 6500K on request.

# DIO



EN 60598 | IP66 | CE



## Optional Accessories



## Photometric Curves

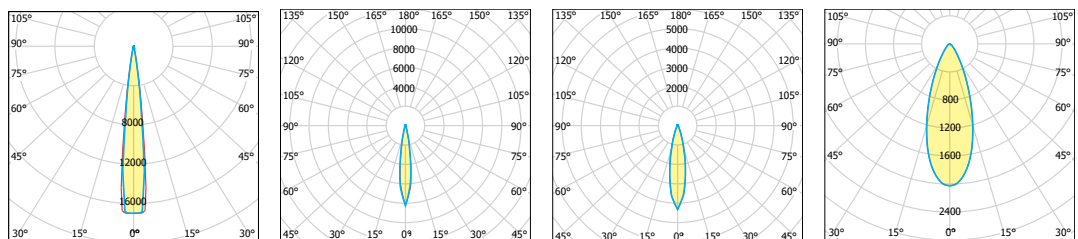

## Technical Specifications

Floodlight made of aluminium die cast

Aluminium and stainless steel fittings

Clear 3mm polycarbon glass

Silicon base seal gasket

Mounting bracket made of plastic

Electrostatic powder coating

Lens angle 8°-15°-25°-36°-60°

Color standard 7040, optional RAL codes

Input 100-240V AC 50 / 60 Hz

Power factor (min.) 0.92

Mono color (Standard)

DALI controllable (optional) (external)

0-10V / 1-10V controllable (optional)(external)

Safety Class I

Protection Class IP66

Operation temperature -25°C / +55°C

Weight: 0,49 kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

