








Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-001-025-006-XX-X	6W	6W	894lm - 941lm	840lm - 884lm	3000K-4000K
01-001-050-012-XX-X	11W	12W	1778lm - 1871lm	1671lm - 1758lm	3000K-4000K
01-001-095-024-XX-X	22W	24W	3555lm - 3741lm	3342lm - 3517lm	3000K-4000K
01-001-140-036-XX-X	33W	36W	5333lm - 5612lm	5013lm - 5275lm	3000K-4000K





XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

NOVA

EN 60598 | IK09 | IP66 | CE

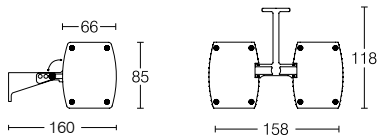

Photometric Curves

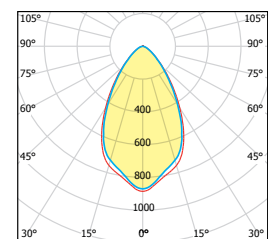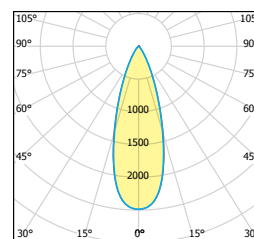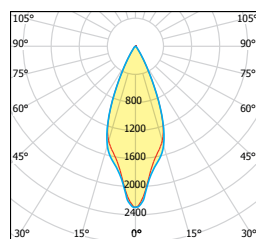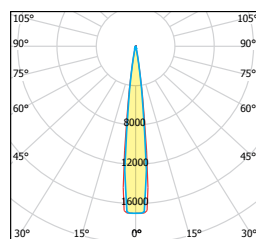

Technical Specifications

- Wallwasher made of aluminium extrusion,
- Clear 5mm safety glass
- Silicon rubber gasket
- Swivel range 95°
- Mounting bracket made of plastic.
- Lens angle 8°- 25°- 45°- 60° - 10°x45°
- Color standard mat anodized,
- Input 198 - 264V AC 50 / 60 Hz
- Power factor (min.) 0.92
- Mono Color (Standard)
- DALI controllable (optional)

- 0-10V / 1-10V controllable (optional)
- Safety class I
- Protection class IP66
- Impact strength IK09
- Operation temperature -25°C / +55°C
- Wind catching area: 0,08m²
- Weight: 24,5cm: 0,95kg / 48cm: 1,8kg
- Weight: 93,5cm: 3,07kg / 140cm: 4,43kg
- EULUMDAT files available
- Complies with European standards
- EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

