



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
30-02-24-9-XX-X	8W	9W	1318lm - 1387lm	1239lm - 1304lm	3000K-4000K

XX : Lens Angle, X : Led Color

Standard color temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRANDS




USED LED BRANDS



ORCA 9



EN 60598 | IP68 | CE



Max. Depth: 80cm



Photometric Curves

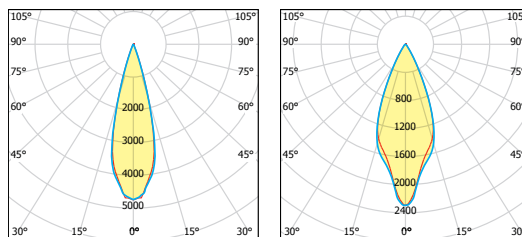

Technical Specifications

Under water made of stainless steel	DALI controllable (Optional)
Clear 3mm polycarbon glass	0-10V / 1-10V controllable (Optional)
Silicon base seal gasket	Safety Class I
Mounting bracket made of stainless steel	Protection Class IP68
Lens angle 30°-50° (9 in 1 full lens)	Operation temperature -25°C / +55°C
Front cover color standard (Chrome)	Weight: 0,57 kg
Input 12 - 24V DC	Complies with European standards
Power factor (min.) 0.92	EN 60598 and CE certificate
Mono color (Standard)	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

