




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
30-03-24-18-XX-X	16W	18W	2636lm - 2774lm	2478lm - 2607lm	3000K-4000K
30-03-24-18-PAR56-XX-X	16W	18W	2636lm - 2774lm	2478lm - 2607lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.



ORCA 18 - ORCA PAR56

EN 60598 | IP68 | CE

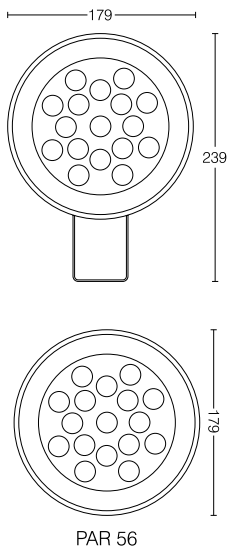

Max. Depth: 80cm

Photometric Curves

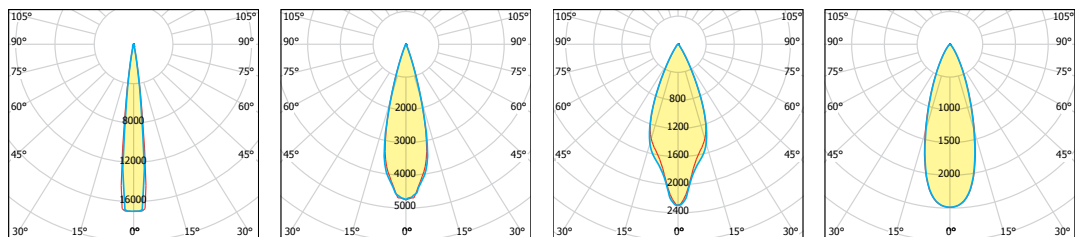

Technical Specifications

Under water made of stainless steel	DALI controllable (Optional)
Clear 3mm polycarbon glass	0-10V / 1-10V controllable (Optional)
Silicon base seal gasket	Safety Class I
Mounting bracket made of stainless steel	Protection Class IP68
Lens angle 8°- 25°- 45°- 60°	Operation temperature -25°C / +55°C
Front cover color standard (Chrome)	Weight: 0,78 kg
Input 24 - 36V DC	Complies with European standards
Power factor (min.) 0.92	EN 60598 and CE certificate
Mono color (Standard)	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

