



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-48-50-120-001-X	46W	50W	7700lm - 7952lm	4158lm - 4294lm	3000K-4000K
60-48-80-180-003-X	73W	80W	11204lm - 11571lm	6050lm - 6249lm	3000K-4000K

X : Led Color

Standard color temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRANDS




USED LED BRANDS





STAR 60

EN 60598 | IK09 | IP65 | CE

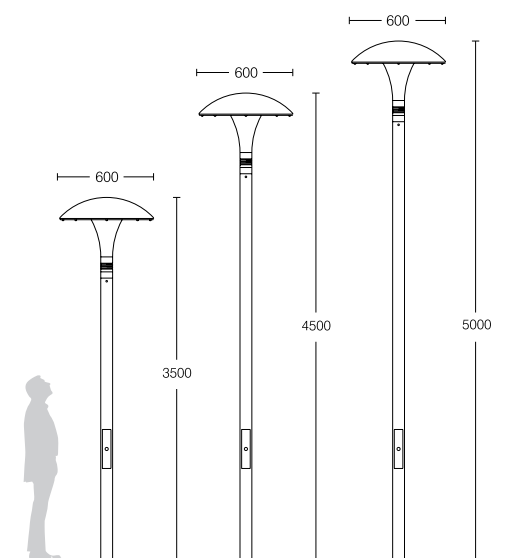

Photometric Curves



Technical Specifications

Urban lights made of aluminium alloy	0-10V / 1-10V controllable (Optional)
Aluminium and stainless steel fittings	Safety Class I
Clear 5mm polycarbon glass	Protection Class IP65
Silicon rubber gasket	Operation temperature -25°C / +55°C
Electrostatic powder coating	Wind catching area: 0,18m ²
Color standard MT-X6-23, optional RAL codes	Weight: 7,3 kg
Input 100 -305V AC 50 / 60 Hz	EULUMDATfiles available
Power factor (min.) 0.92	Complies with European standards
Mono color (Standard)	EN 60598 and CE certificate
DALI controllable (Optional)	

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

