



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-49-50-XX	46W	50W	7000lm - 7250lm	6169lm - 6492lm	3000K-4000K

Standard color temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRANDS




USED LED BRANDS





AMON

EN 60598 | IP65 | CE

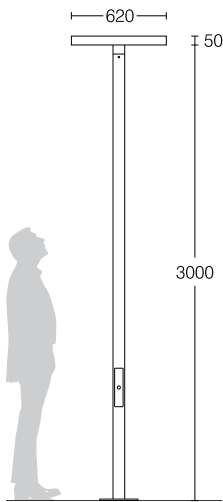

Photometric Curves



Optional Accessories

- Standard pole height 3 meter + head
- Optional pole height : 3,5 / 4 meter + head



Technical Specifications

Urban lights made of aluminium die cast	Mono color (Standard)
Aluminium and stainless steel fittings	DALI controllable (Optional)
Opak 5mm polycarbon glass	0-10V / 1-10V controllable (Optional)
Silicon rubber gasket	Safety Class I
Electrostatic powder coating	Protection Class IP65
Color standard MT-X6-23, optional RAL codes	Operation temperature -25°C / +55°C
LED power supply unit	Wind catching area: 0,09m ²
Input 90-264V AC 50 / 60 Hz	Weight: 3 kg
Power factor (min.) 0.92	Complies with European standards
6kV surge protection (Optional)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

