



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
01-02-35-12-XX-RGBW(A)	11W	12W
01-02-35-24-XX-RGBW(A)	22W	24W
01-02-70-24-XX-RGBW(A)	22W	24W
01-02-70-48-XX-RGBW(A)	44W	48W
01-02-100-36-XX-RGBW(A)	33W	36W
01-02-100-72-XX-RGBW(A)	66W	72W
01-02-130-48-XX-RGBW(A)	44W	48W
01-02-130-96-XX-RGBW(A)	87W	96W

XX : Lens Angle, X : Led Color

USED POWER SUPPLY BRANDS




USED LED BRANDS



VEGA RGBW(A)

EN 60598 | IK08 | IP66 | CE

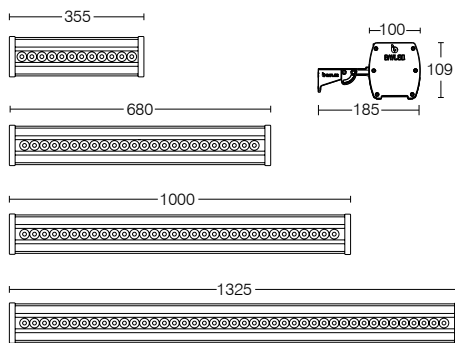

FEATURES

Color-changing and high-quality white light from the same fixture. Vega is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED lightsources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light.

FIXTURE RUN LENGTHS


To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

DMX 512

Interface : Data Enabler (DMX/Bayled)
 Address method : DMX512 (RDM)
 Fixture Connections : Male/female IP67 connectors



Photometric Curves

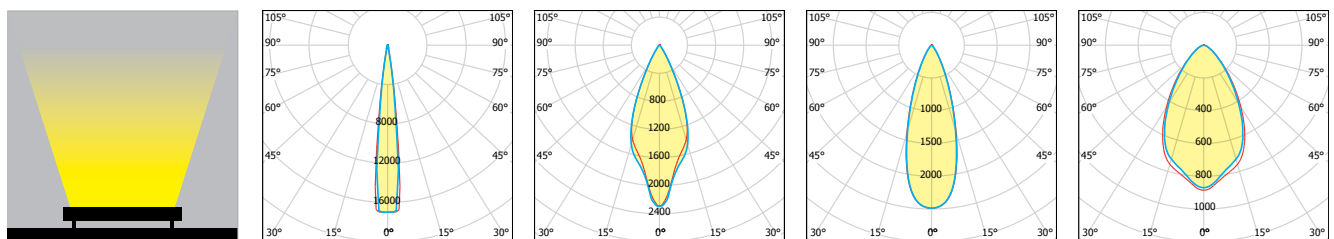

Technical Specifications

Wallwasher made of aluminium extrusion,	DMX 512 / RDM
Clear 5mm safety glass	Safety class I
Silicon rubber gasket	Protection Class IP66
Swivel range 95°	Impact strenght IK08
Mounting bracket made of plastic.	Operation temperature -25°C / +55°C
Lens angle 8°- 25°- 45°- 60° -10°x45°	Wind catching area: 0,14m ²
Color standard mat anodized,	Weight: 35,5cm: 2kg / 68cm: 3.53kg
Input 198 - 264V AC 50 / 60 Hz	Weight: 100cm: 4.84kg / 132,5cm: 6.3kg
Power factor (min.) 0.92	Complies with European standards
	EN 60598 and CE certificate

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

