



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
15-04-50-18-XX-X	16W	18W
15-04-100-36-XX-X	33W	36W


XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

LIBRA RGB

EN 60598 | IK09 | IP67 | CE

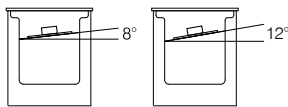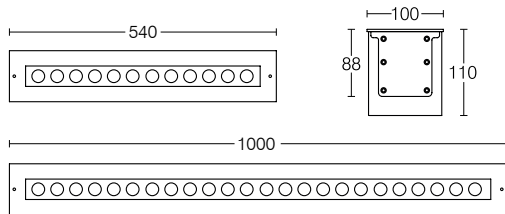

LEDs can be adjusted with 8° and 12° inclination in the luminaire.

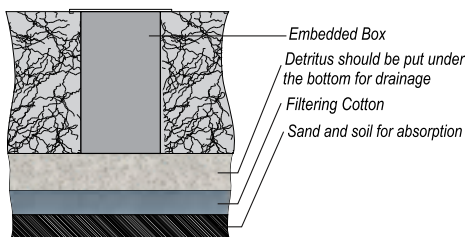

FEATURES

Color-changing and high-quality white light from the same fixture. Vega is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED light sources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light with CRI of greater than 85 in 2700K-4000K range.


FIXTURE RUN LENGTHS

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

DMX 512

Interface : Data Enabler (DMX/Bayled)
 Address method : Digital
 Fixture Connections : Male/female XLR

Photometric Curves

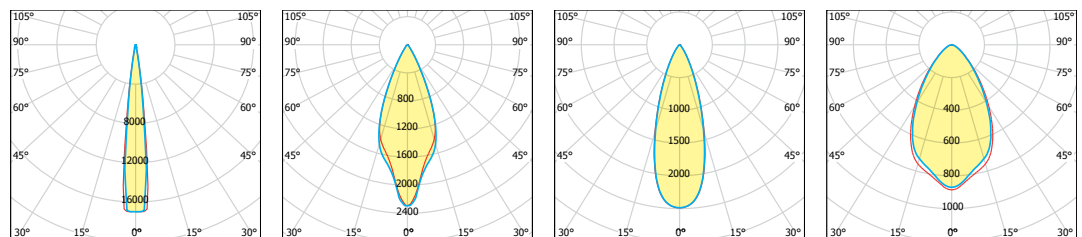

Technical Specifications

Inground made of aluminium extrusion,	RGB (Standard)
Aluminium and stainless steel	DMX 512 (Optional), RF (Optional)
Clear 8mm safety glass	Safety Class I
Silicon base seal gasket	Protection Class IP67
Mounting bracket made of steel	Impact strength IK09
Electrostatic powder coating	Operation temperature -25°C / +55°C
Lens angle 8°-25°-45°-60°	Weight: 18W: 5,1kg / 36W: 9,98kg
Color standard 7040, optional RAL codes	Complies with European standards
Input 85V -305V DC	EN 60598 and CE certificate
Power factor (min.) 0.92	

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

