




#### Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-52-50-X	46W	50W	6169lm - 6492lm	3000K-4000K
60-52-80-X	73W	80W	9871lm - 10387lm	3000K-4000K



X : Led Color

# MACULO

EN 60598 | IP65 | CE

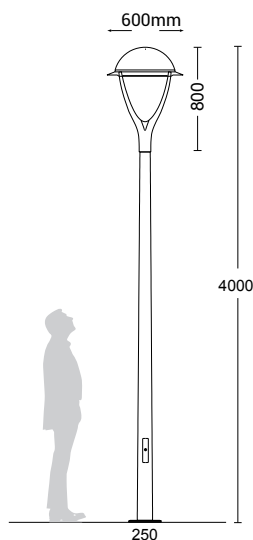

## Photometric Curves



## Technical Specifications

Total Height 4m

Body Pole Steel (coated with electro galvanized)-Standard, Steel (Coated with hot dip galvanized)-upon request, Aluminium and steel conical poles - upon request

Bracket Manufactured from cast Aluminium

All RAL Codes or Special architectural paints

Luminary Part Manufactured from Aluminium

Insulation Class II

Diffuser Tempered Glass

Mounting Detail Anchor System

LED Driver 227-364 mA

Cable 3\*1,5TTR Non-flammable cable

Operating Temperature -20°C +55°C

CRI 3000K>80 / 4000K>70

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

