



Purchase Order Table

SINGLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-55-90-XX-X	82W	90W	11801lm - 12418lm	3000K-4000K
60-55-120-XX-X	109W	120W	15373lm - 16177lm	3000K-4000K

DOUBLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-55-180-XX-X	164W	180W	23602lm - 24836lm	3000K-4000K
60-55-220-XX-X	200W	220W	28960lm - 30474lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRANDS




USED LED BRANDS








WAAGE

EN 60598 | IK08 | IP66 | CE

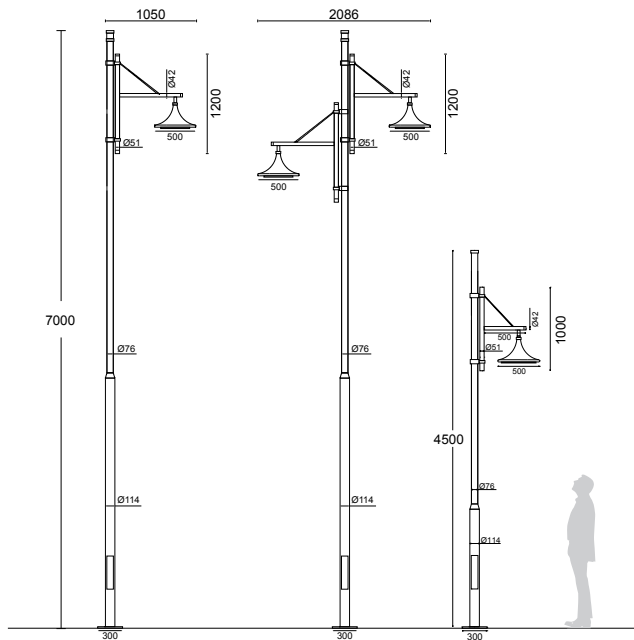

Photometric Curves



Technical Specifications

Total Height 3m-9,5m	Mounting Detail Anchor System
Body Pole, Steel (coated with electro galvanized)-Standard, Steel (Coated with hot dip galvanized)-upon request, Aluminium and steel conical poles - upon request	Impact Resistance IK08
Bracket Manufactured from steel	LED Driver 350-700mA
All RAL Codes or Special architectural paints	Cable 3*1,5TTR Non-flammable
Luminaire Part Manufactured from Aluminium	Operating Temperature -25°C +55°C
Protection Class IP66	LED Module 12/16/24/32/36/48
Insulation Class II	Elliptical Shaped asymmetrical lenses
	CRI 3000K>80 / 4000K>70

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

