




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-57-50-X	46W	50W	6169lm - 6492lm	3000K-4000K

X : Led Color

# TORRE

EN 60598 | IK10 | IP65 | CE

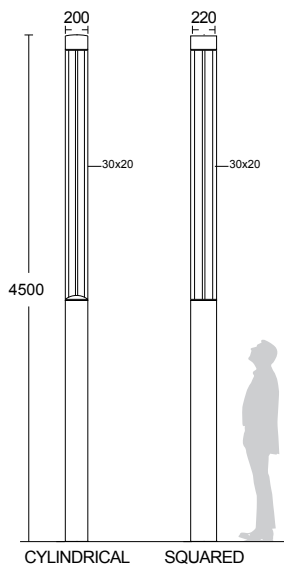



## SQUARED



## CYLINDRICAL



## Photometric Curves



## Technical Specifications

Total Height 4,5m  
 Body Pole Aluminium  
 All RAL Codes or Special architectural paints  
 Luminary Part Manufactured from Aluminium  
 Protection Class IP65  
 Insulation Class II

Mounting Detail Anchor System  
 LED Driver 227mA  
 Cable 3\*1,5TTR Non-flammable  
 Operating Temperature -20°C +55°C  
 Elliptical Shaped asymmetrical lenses  
 CRI 3000K>80 / 4000K>70

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

