BAYLED ®

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-58-80-X	73W	80W	9871lm - 10387lm	3000K-4000K

Fixture watt which is given for double head
X : Led Color

USED POWER SUPPLY BRANDS
MW PHILIPS LEDVANCE MOSO

USED LED BRANDS
NICHIA
LUMILEDS

BLOCCO

MOVABLE HEADS

FRONT VIEW	SIDE VIEW
820	820
120	120
400	400
80	80
150	350
400	400
80	80
350	150

5000

MOVABLE HEADS

FRONT VIEW	SIDE VIEW
420	820
120	120
400	400
80	80
150	350

4000

300 | 300 | 300 | 300
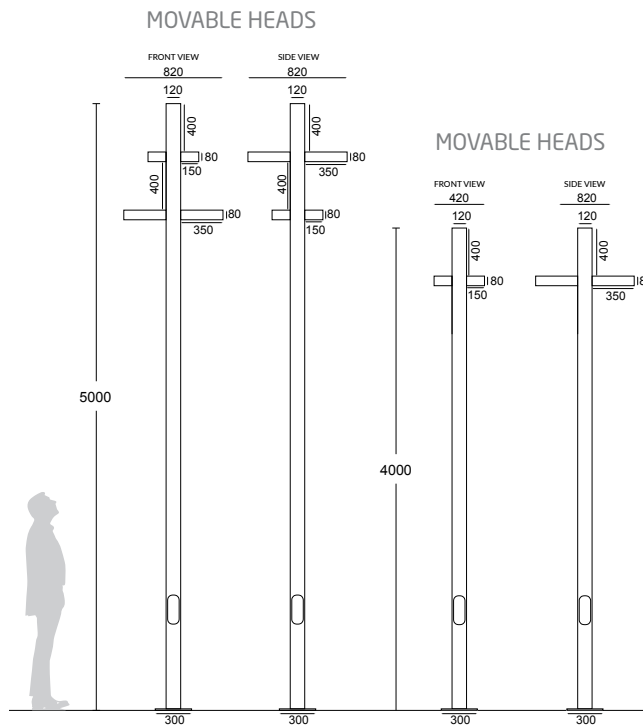
Technical Specifications

Total Height 5m	Mounting Detail Anchor System
Body Pole Aluminium Profile	LED Driver 364mA
All RAL Codes or Special architectural paints	Cable 3*1,5TTR Non-flammable
Luminary Part Manufactured from Aluminium	Operating Temperature -20°C +55°C
Diffuser PMMA	Eliptical Shaped asymmetrical lenses
Insulation Class II	CRI 3000K>80 / 4000K>70

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least

LED | no UV | no IR | VCO₂ | LONG LIFE | Energy Saver | ♻ | IP65 | | | ◉ | CLASS II | CE | RoHS

Scan QR Code to get all technical documents
and the other updated files for this product.