



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-61-30-X	27W	30W	3701lm - 3895lm	3000K-4000K

Fixture watt which is given for single head

X : Led Color

USED POWER SUPPLY BRANDS




USED LED BRANDS





# BONITA

EN 60598 | IP65 | CE

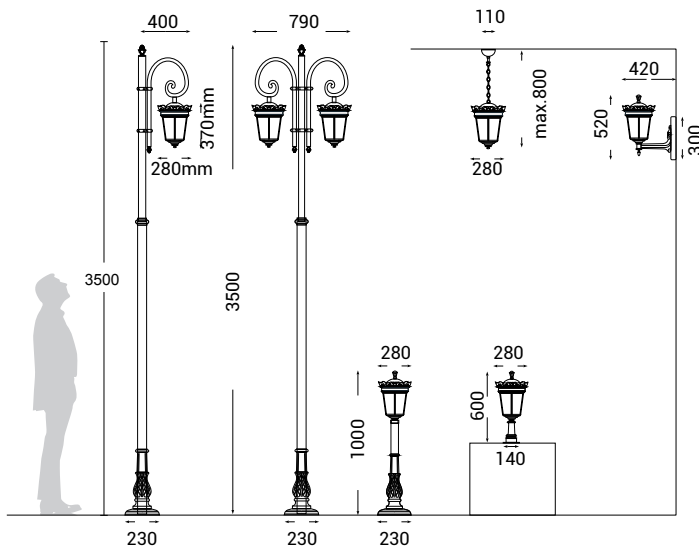

## Photometric Curves



## Technical Specifications

Luminaire Dimensions Ø280x370mm	Luminaire Part Manufactured from Aluminium
Total Height 0,6m-3,5m	Diffuser Tempered Glass / PMMA
Body Pole Steel (coated with electro galvanized)-Standard, Steel (Coated with hot dip galvanized)-upon request, Aluminium and steel conical poles - upon request	Insulation Class II
Base and Bracket Manufactured from Cast Aluminium	Mounting Detail Anchor System
All decorative parts are manufactured from high quality aluminium (ETIAL 160) by sand casting technique	Ballast Magnetic (Standart) / Electronic (Upon request)
All RAL Codes or Special architectural paints	Cable 3*1,5TTR Non-flammable cable
	Operating Temperature -20°C +55°C
	CRI 3000K>80 / 4000K>70

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.