



Purchase Order Table

HIT	CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
	60-63-70-X	64W	70W	6090lm - 6510lm	830K-840K
60-63-150-X	136W	150W	13050lm - 13950lm	830K-840K	

LED	CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
	60-63-50-X	46W	50W	6169lm - 6492lm	3000K-4000K
60-63-80-X	73W	80W	9871lm - 10387lm	3000K-4000K	

Fixture watt which is given for single head
X : Led Color

USED POWER SUPPLY BRANDS




USED LED BRANDS





EQUO

EN 60598 | IP65 | CE

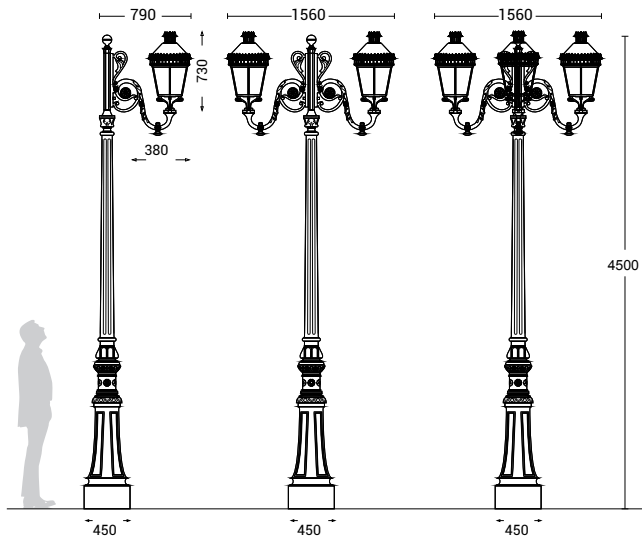

Photometric Curves



Technical Specifications

Luminary Dimensions Ø380x730mm	Diffuser PMMA
Total Height 4,5m	Insulation Class II
Body Pole Manufactured from Cast Aluminium	Mounting Detail Anchor System
Base and Bracket Manufactured from Cast Aluminium	High pressure electrical system
All RAL Codes or Special architectural paints	Ballast Magnetic (Standart) / Electronic (Upon request)
All decorative parts are manufactured from high quality aluminium (ETIAL 160) by sand casting technique	Cable 3*1,5TTR Non-flammable cable
Luminary Part Manufactured from Aluminium	Operating Temperature -20°C +55°C
	CRI 3000K>80 / 4000K>70

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

