



### Purchase Order Table

HPS

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-64-250-X	227W	250W	26750lm - 28000lm	830K-840K
60-64-400-X	364W	400W	42800lm - 44800lm	830K-840K

LED

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-64-100-X	91W	100W	11500lm - 12000lm	3000K-4000K

X : Led Color

USED POWER SUPPLY BRANDS




USED LED BRANDS





# REGIO

EN 60598 | IP65 | CE

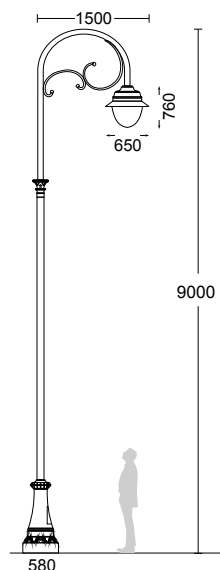

## Photometric Curves



## Technical Specifications

Luminary Dimensions 580x950mm	All RAL Codes or Special architectural paints
Total Height 9m	Diffuser PMMA
Body Pole Steel (coated with electro galvanized)-Standard, Steel (Coated with hot dip galvanized)-upon request, Aluminium and steel conical poles - upon request	Insulation Class II
Base and Bracket Manufactured from Cast Aluminium	Mounting Detail Anchor System
All decorative parts are manufactured from high quality aluminium (ETIAL 160) by sand casting technique	High pressure electrical system
All RAL Codes or Special architectural paints	Ballast Magnetic (Standart)
Luminary Part Manufactured from Aluminium	Cable 3*1,5TTR Non-flammable cable
	Operating Temperature -20°C +55°C
	CRI 3000K>80 / 4000K>70

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

