




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
84-D200-20-X	18W	20W	1700lm - 1760lm	3000K-4000K
84-D200-28-X	26W	28W	2268lm - 2324lm	3000K-4000K
84-D200-35-X	32W	35W	2695lm - 2800lm	3000K-4000K


X : Led Color

MARCO D200

EN 60598 | IK08 | IP66 | CE

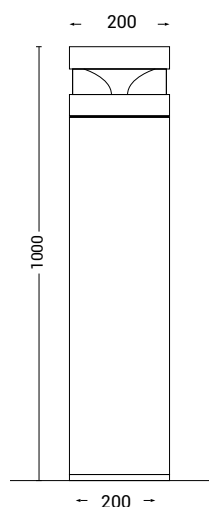

Photometric Curves



Technical Specifications

Luminary Dimensions Ø200mm	Impact Resistance IK08
Total Height 1m-0,4m	LED Driver 91-159 mA
Body Pole Aluminium (coated with electro galvanized)-Standard	Cable 3*1,5TTR Non-flammable cable
All RAL Codes or Special architectural paints	Operating Temperature -20°C +55°C
Diffuser Plexi glass	Color Temperature 3000K / 4000K
Insulation Class II	CRI 3000K>80 / 4000K>70
Mounting Detail Anchor System	

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

