




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-69-20-X	18W	20W	1640lm - 1800lm	3000K-4000K


X : Led Color

LANTERNA

EN 60598 | IK08 | IP65 | CE

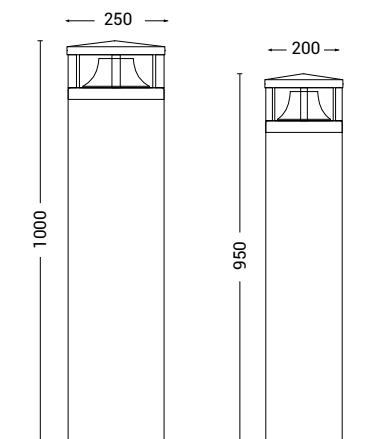

Photometric Curves



Technical Specifications

Luminary Dimensions Ø200mm - Ø250mm

Total Height 0,95m-1m

Body Pole Steel (coated with electro galvanized)-Standard

All RAL Codes or Special architectural paints

Diffuser Plexi glass

Insulation Class II

Mounting Detail Anchor System

Impact Resistance IK08

LED Driver 91 mA

Cable 3*1,5TTR Non-flammable cable

Operating Temperature -20°C +55°C

Color Temperature 3000K / 4000K

CRI 3000K>80 / 4000K>70

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

