



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-05-50-40-XX-X	46W	50W	7000lm - 7516lm	6579lm - 7065lm	3000K-4000K

XX : Lens Angle, X : Led Color





Standard color temperature 4000K, also available with 6500K on request.

MINARET

EN 60598 | IK09 | IP66 | CE

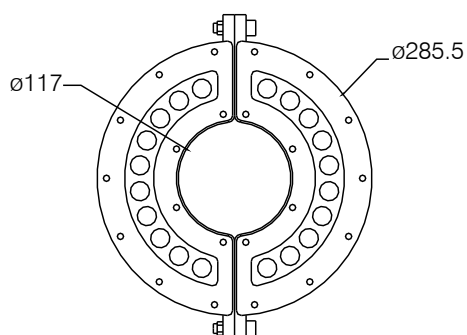

Photometric Curves

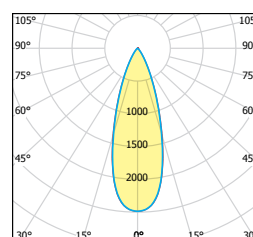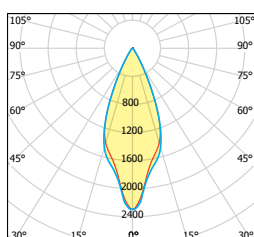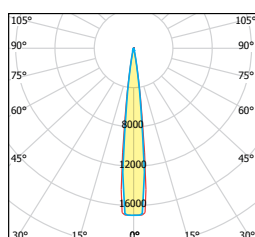

Technical Specifications

Wallwasher made of aluminium die cast

Clear pleksi glass

Silicon rubber gasket

Mounting bracket made of plastic.

Lens angle 8°-25°- 40°

Color standard MT-X6-23, optional RAL codes.

Input 110 - 240V AC 50 / 60 Hz

Power factor (min.) 0.92

Mono Color (Standard), Amber (Optional), Green (Optional)

DALI controllable (optional)

0-10V / 1-10V controllable (optional)

Safety class I

Protection class IP65

Operation temperature -25°C / +55°C

Wind catching area: 0,03m²

Weight: 7,3kg

EULUMDAT files available

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

