





Purchase Order Table

| CODE | MODULE POWER | LUMINAIRE POWER | MODULE LUMINOUS FLUX | LUMINAIRE LUMINOUS FLUX | COLOR TEMPERATURE |
|---------------------|--------------|-----------------|----------------------|-------------------------|-------------------|
| 90-02-65-50-192-X | 46W | 50W | 8268lm-8540lm | 6966lm-7172lm | 3000K-4000K |
| 90-02-65-70-192-X | 64W | 70W | 10906lm-11264lm | 9162lm-9462lm | 3000K-4000K |
| 90-02-125-100-384-X | 91W | 100W | 16536lm-17080lm | 13932lm-14344lm | 3000K-4000K |
| 90-02-125-140-384-X | 127W | 140W | 21812lm-22528lm | 18322lm-18924lm | 3000K-4000K |
| 90-02-240-210-768-X | 191W | 210W | 34504lm-35636lm | 28984lm-29934lm | 3000K-4000K |
| 90-02-240-280-768-X | 255W | 280W | 43624lm-45056lm | 36648lm-37848lm | 3000K-4000K |

X : Led Color
Standard color temperature 4000K, also available with 6500K on request.



EXEGI 2

EN 60598 | IK10 | IP66 | CE

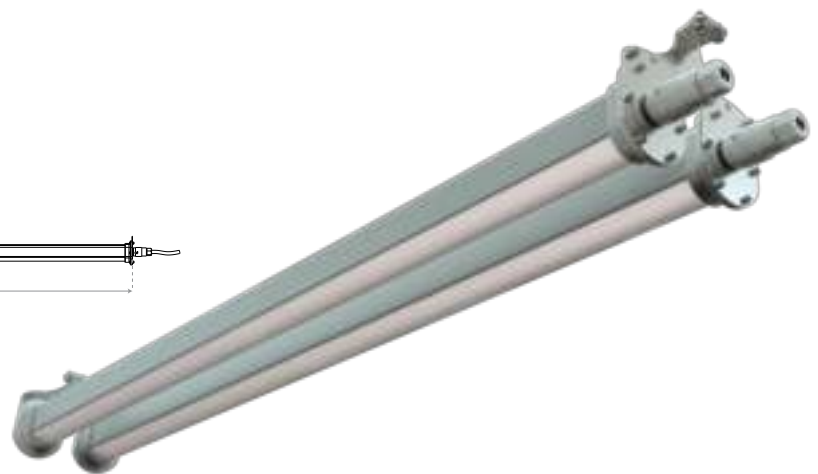
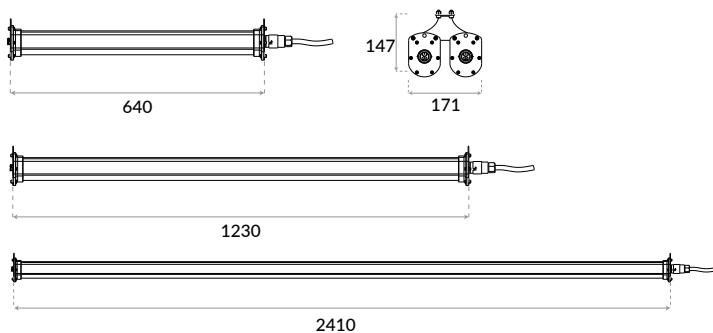


CABLE MOUNT

MOUNT WITH STEEL CLAMP



Photometric Curves




SURFACE MOUNT



CABLE MOUNT

STEEL CLAMP ▶



SHORT ▶



LONG ▶



Technical Specifications

- Polycarbon and Aluminium profile.
- Stainless Steel and Polycarbon lids.
- Silicon rubber gasket
- Mounting bracket made of stainless steel.
- LED chip angle 120°(without lens)
- Color standard mat anodized,
- Input 198 - 264V AC 50 / 60 Hz
- Power factor (min.) 0.92
- Mono Color (Standard)
- DALI controllable (optional)

- 0-10V / 1-10V controllable (optional)
- Safety class I
- Protection class IP66
- Impact strenght IK10
- Operation temperature -25°C / +55°C
- Wind catching area: 0,14m²
- Weight: 64cm: 2.79kg / 123cm: 4.83kg / 240cm: 8.89kg
- EULUMDAT files available
- Complies with European standards
- EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

