









Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-04-32-12-XX-X	11W	12W	1725lm - 1815lm	1621lm - 1706lm	3000K-4000K
01-04-61-24-XX-X	22W	24W	3449lm - 3629lm	3242lm - 3412lm	3000K-4000K
01-04-91-36-XX-X	33W	36W	5174lm - 5444lm	4863lm - 5117lm	3000K-4000K
01-04-120-48-XX-X	44W	48W	6898lm - 7259lm	6484lm - 6824lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

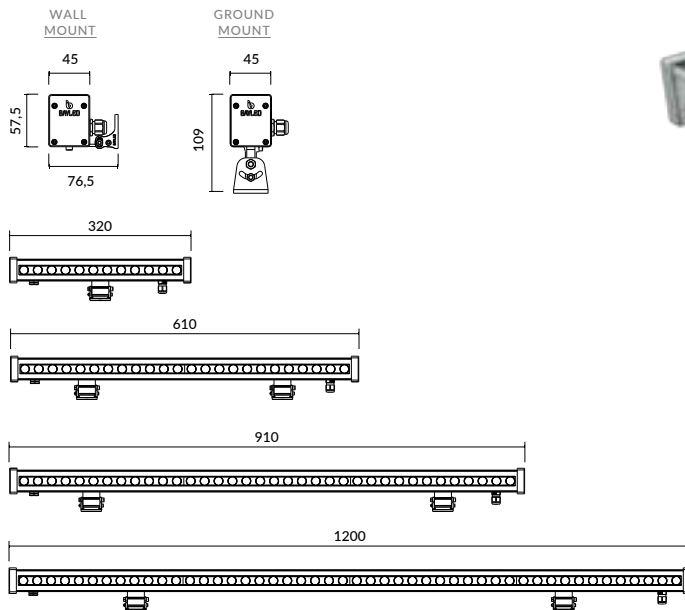

Photometric Curves



Technical Specifications

Wallwasher made of aluminium extrusion,
 Clear 5mm safety glass
 Silicon rubber gasket
 Swivel range 30°
 Mounting bracket made of plastic.
 Multi Lens (linear): 17° - 25° - 35° - 20°x45°(asym) , Single Lens: 12° - 60° - 90°
 Color standard mat anodized,
 Input 198 - 264V AC 50 / 60 Hz
 Power factor (min.) 0.92
 Mono Color (Standard)

DALI controllable (optional)
 0-10V / 1-10V controllable (optional)
 Safety class I
 Protection class IP66
 Impact strength IK09
 Operation temperature -25°C / +55°C
 Wind catching area: 0,03m²
 Weight: 32cm: 0,7kg / 61cm: 1,2kg / 91cm: 1,7kg / 120cm: 2,2kg
 Complies with European standards
 EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

