





TUNABLE

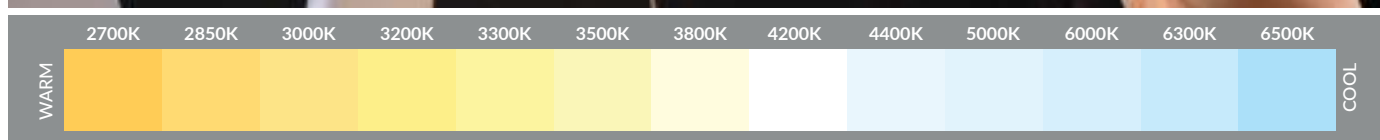

Photometric Curves

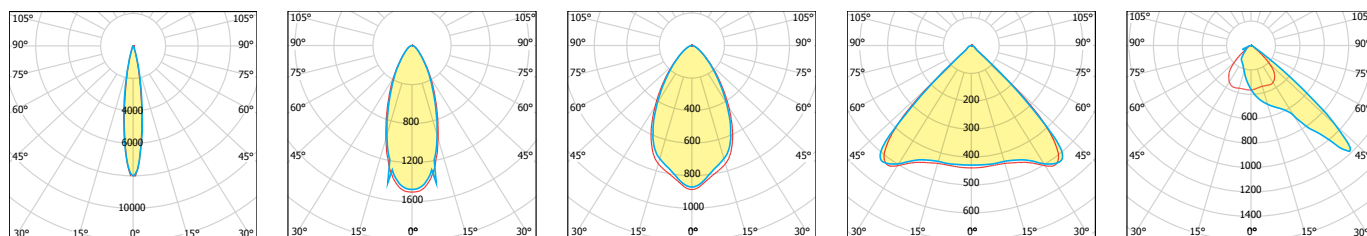

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-01-175-336-XX-TW	159W	175W	27125lm	25498lm	Tunable 2700K to 6500K
45-01-230-336-XX-TW	209W	230W	34040lm	31998lm	Tunable 2700K to 6500K
45-01-300-336-XX-TW	273W	300W	45156lm	42600lm	Tunable 2700K to 6500K

XX : Lens Angle

USED POWER SUPPLY BRANDS




USED LED BRANDS



SIRUS L TUNABLE

EN 60598 | IK08 | IP66 | CE

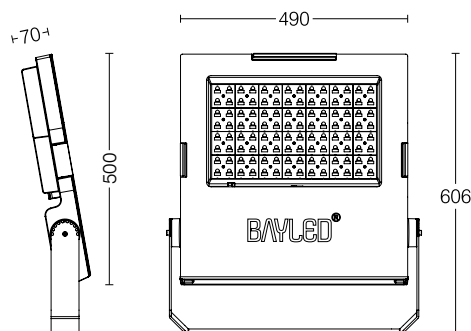

FEATURES

High-quality tunable white light from the same fixture. Sirius-L Tunable is an advanced approach to light tuning that enables high-quality intelligent tunable white.

Sirus L Tunable luminaires - CCT from 2700K to 6500K, dimming from 100% to 1% - help designers tailor the illumination and ambiance to satisfy user needs and preferences.

DALI - 0-10V

Interface : Controllable driver
Control method : Analog with cable
Fixture Connections : With control cable


DALI BLUETOOTH

Interface : Controllable driver
Control method : Bluetooth
Fixture Connections : With control cable



FIXTURE RUN LENGHTS

To calculate fixture run lenghts and total power consumption for your specific installation, please ask to company assistant.

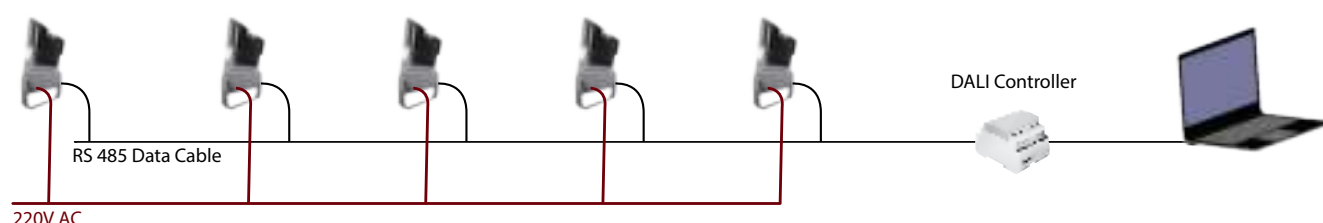

Technical Specifications

Floodlight made of aluminium die cast
Galvanized steel fittings
Clear 5mm safety glass
Silicon rubber gasket
Swivel range 180°
Mounting bracket made of steel with
Electrostatic powder coating
Lens angle 15°-40°-60°-90°-30°x96°
Color standard MT-X6-23, optional RAL codes
Input 100 - 305V AC 50 / 60 Hz
Power factor (min.) 0.92
Tunable White PWM signal with RC (Standard)

DALI or Bluetooth(optional) controllable
0-10V / 1-10V controllable (Optional)
Safety Class I
Protection class IP66
Impact strenght IK08
Operation temperature -25°C / +55°C
Wind catching area: 0,24m²
Weight: 16,36 kg
EULUMDAT files available
Complies with European standards
EN 60598 and CE certificate

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

