




Purchase Order Table

CODE	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-09-50-24-X	7W	228lm-236lm	3000K-4000K
01-09-100-48-X	15W	456lm-470lm	3000K-4000K
01-09-150-72-X	22W	684lm-706lm	3000K-4000K
01-09-200-96-X	30W	912lm-942lm	3000K-4000K

XX : Length
 X : Number of LEDs (48 LED/m)

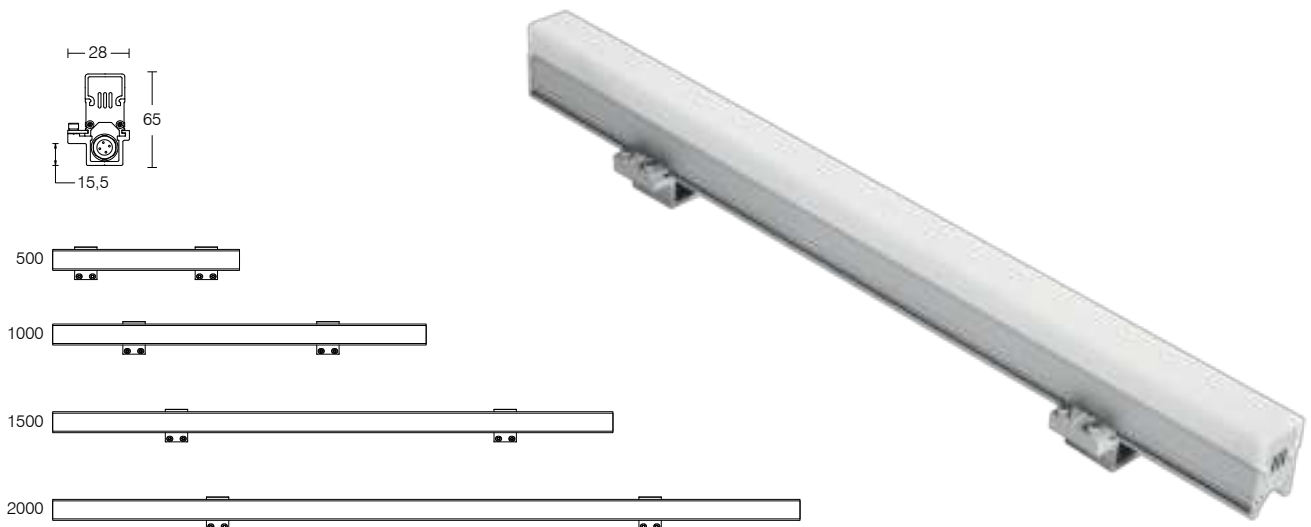

IP67 SOCKET



Technical Specifications

Linear lights made of aluminium extrusion	0-10V / 1-10V controllable (Optional)
Clear - Opal polycarbon diffuser (Optional)	DMX 512 (Optional)
Color standard mat anodizing	Safety Class II
Input 24V DC	Protection Class IP67
Power factor (min.) 0.92	Operation temperature -25°C / +55°C
Diffuser angle 180°	Complies with European standards
Mono color (Standard)	EN 60598 and CE certificate
DALI controllable (Optional)	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

