




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-08-30-6-XX-X	6W	6W	1014lm-1071lm	933lm-991lm	3000K - 4000K
01-08-60-12-XX-X	11W	12W	1951lm-2070lm	1795lm-1905lm	3000K - 4000K
01-08-90-18-XX-X	16W	18W	2792lm-2963lm	2569lm-2726lm	3000K - 4000K
01-08-120-24-XX-X	22W	24W	4197lm-4458lm	3861lm-4102lm	3000K - 4000K


XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

ARSEN DC (24V)

EN 60598 | IK09 | IP66 | CE

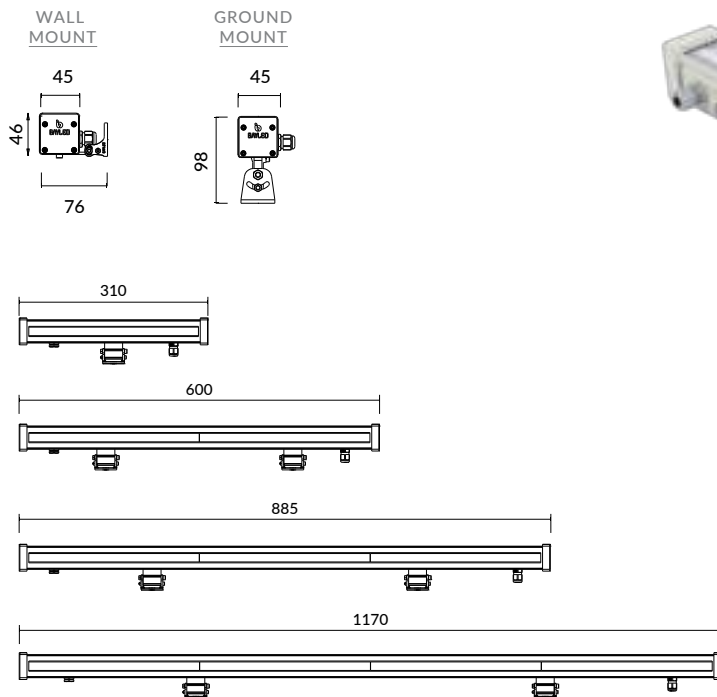

Photometric Curves

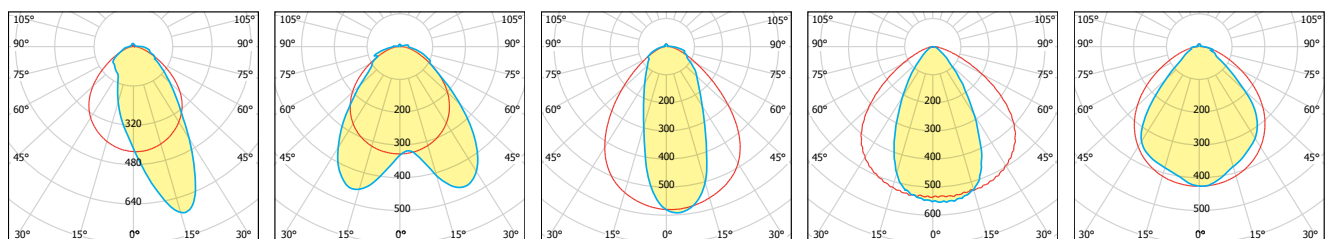

Technical Specifications

Wallwasher made of aluminium extrusion,	DALI controllable (optional)
Clear 5mm safety glass	0-10V / 1-10V controllable (optional)
Silicon rubber gasket	Safety class I
Swivel range 30°	Protection class IP66
Mounting bracket made of plastic.	Impact strength IK09
Lens angle 18°- 25°- 30°x90°- 60°x110°- 90°x110°	Operation temperature -25°C / +55°C
Color standard mat anodized,	Wind catching area: 0,02m²
Input 24V DC	Weight: 31cm: 0,5kg / 60cm: 1kg / 88,5cm: 1,5kg / 117cm: 2kg
Power factor (min.) 0.92	Complies with European standards
Mono Color (Standard)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

