



24 V SOLAR



Purchase Order Table



SIRUS
SIRUS M

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-06-50-24-90-XX-X	45W	50W	7236lm-7614lm	6657lm-7005lm	3000K-4000K
45-06-100-24-90-XX-X	91W	100W	13629lm-14341lm	12538lm-13194lm	3000K-4000K
45-07-130-24-180-XX-X	118W	130W	19692lm-20722lm	18117lm-19064lm	3000K-4000K
45-07-200-24-180-XX-X	182W	200W	27257lm-28682lm	25077lm-26387lm	3000K-4000K

XX : Lens Angle, X : Led Color
Standard color temperature 4000K, also available with 6500K on request.

SIRUS / SIRUS M SOLAR (24V)

EN 60598 | IK09 | IP66 | CE

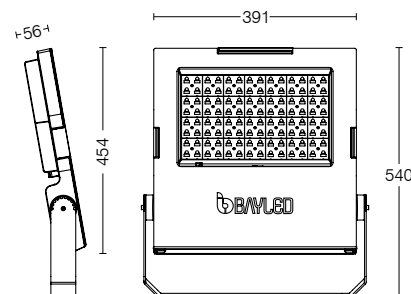

Technical Specifications

Floodlight made of aluminium die cast	Mono color (Standard)
Galvanized steel fittings	DALI controllable (Optional)
Clear 5mm safety glass	Safety Class I
Silicon rubber gasket	Protection Class IP66
Swivel range 180°	Impact strength IK09
Mounting bracket made of steel with	Operation temperature -25°C / +55°C
Electrostatic powder coating	Wind catching area: 0,10m² / 0,17m²
Lens angle 15° - 40° - 60° - 90° - 30°x96°	Weight: Sirus: 6,3 kg / Sirus M: 10 kg
Color standard MT-X6-23, optional RAL codes	EULUMDAT files available
Power factor (min.) 0.92	Complies with European standards
Input 24V DC	EN 60598 and CE certificate

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

