



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-78-20-X	18W	20W	1640lm - 1800lm	3000K-4000K

X : Led Color

USED POWER SUPPLY BRANDS




USED LED BRANDS



FRANCO

EN 60598 | IP65 | CE

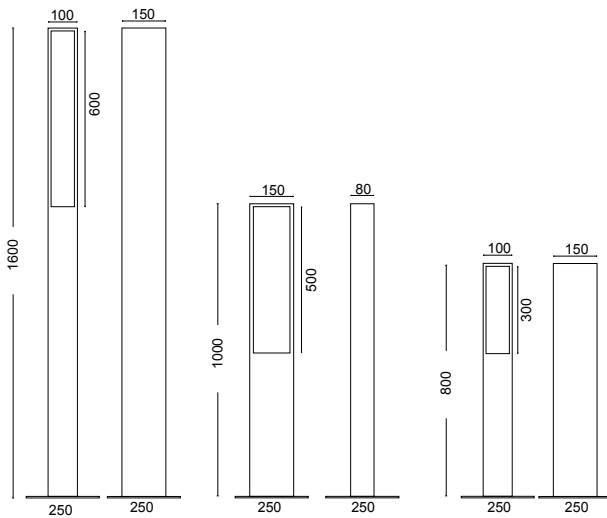

Technical Specifications

Body Pole, Aluminium Profile - Standard	Led Driver, 91 mA
Luminary Part, Manufactured from all aluminium	Power Consumption, Max 20W
Protection Class, IP 65	Cable , 3*1 TTR Non-flammable cable
Insulation Class II	Operating Temperature, -20°C + 55°C
Mounting Detail, Anchor System	Led Module
Paint, All RAL codes or Special architectural paints	Color Temperature, 3000K / 4000K
Luminary Dimensions, 150x100mm, 150x80mm	CRI, 3000K >80 / 4000K >70
Total Height, 800-1000-1600mm	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

