



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER
45-07-80-60-XX-RGB	73W	80W
45-07-115-60-XX-RGB	105W	115W
45-07-160-60-XX-RGB	146W	160W
45-07-75-56-XX-RGBW	68W	75W
45-07-110-56-XX-RGBW	100W	110W
45-07-150-56-XX-RGBW	136W	150W

XX : Lens Angle



SIRUS M RGB - RGBW(A)

EN 60598 | IK09 | IP66 | CE

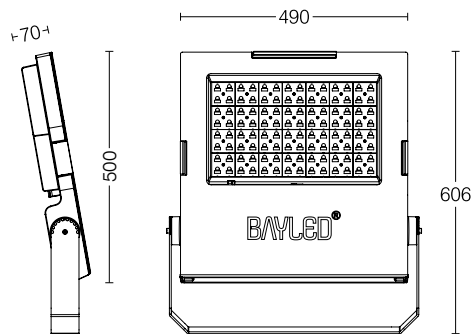

FEATURES

Color-changing and high-quality white light from the same fixture. Sirius-M is an advanced approach to color mixing that enables high-quality intelligent color.

Multiple channels of LED lightsources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light.

DMX 512



Interface : Data Enabler (DMX/Bayled)
 Address method : DMX512 (RDM)
 Fixture Connections : Male/female IP67 connectors



FIXTURE RUN LENGTHS

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

Photometric Curves

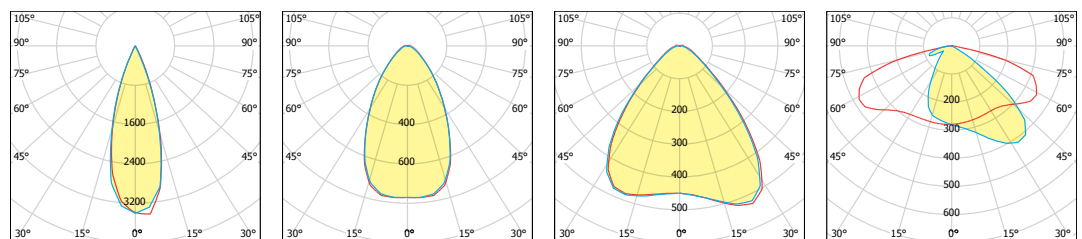

Technical Specifications

Floodlight made of aluminium die cast	DMX 512 / RDM
Galvanized steel fittings	Safety Class I
Clear 5mm safety glass	Protection class IP66
Silicon rubber gasket	Impact strenght IK09
Swivel range 180°	Operation temperature -25°C / +55°C
Mounting bracket made of steel with	Wind catching area: 0,24m²
Electrostatic powder coating	Weight: 10 kg
Lens angle 30°-60°-90°-ASYM	EULUMDAT files available
Color standard MT-X6-23, optional RAL codes	Complies with European standards
Input 85-264 V AC 50 / 60 Hz	EN 60598 and CE certificate
Power factor (min.) 0.92	

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

