


SIRUS L TUNABLE

EN 60598 | IK08 | IP66 | CE

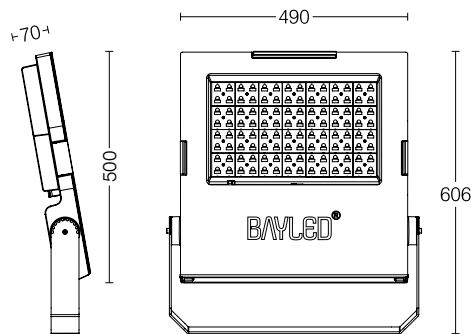

FEATURES

High-quality tunable white light from the same fixture. Sirius-L Tunable is an advanced approach to light tuning that enables high-quality intelligent tunable white.

Sirius L Tunable luminaires - CCT from 2700K to 6500K, dimming from 100% to 1% - help designers tailor the illumination and ambiance to satisfy user needs and preferences.

DALI - 0-10V

Interface : Controllable driver
Control method : Analog with cable
Fixture Connections : With control cable


DALI BLUETOOTH

Interface : Controllable driver
Control method : Bluetooth
Fixture Connections : With control cable



FIXTURE RUN LENGHTS

To calculate fixture run lenghts and total power consumption for your specific installation, please ask to company assistant.

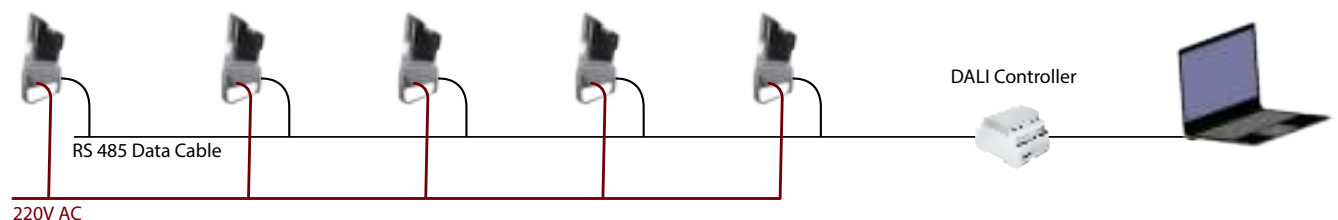

Technical Specifications

Floodlight made of aluminium die cast	DALI or Bluetooth(optional) controllable
Galvanized steel fittings	0-10V / 1-10V controllable (Optional)
Clear 5mm safety glass	Safety Class I
Silicon rubber gasket	Protection class IP66
Swivel range 180°	Impact strenght IK08
Mounting bracket made of steel with	Operation temperature -25°C / +55°C
Electrostatic powder coating	Wind catching area: 0,24m²
Lens angle 15°-40°-60°-90°-30°x96°	Weight: 16,36 kg
Color standard MT-X6-23, optional RAL codes	EULUMDAT files available
Input 100 -305V AC 50 / 60 Hz	Complies with European standards
Power factor (min.) 0.92	EN 60598 and CE certificate
Tunable White PWM signal with RC (Standard)	

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.





Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
45-06-40-28-XX-RGB	36W	40W
45-06-75-28-XX-RGB	67W	75W
45-06-45-32-XX-RGBW	41W	45W
45-06-85-32-XX-RGBW	76W	85W

XX : Lens Angle