



RGB CONSTANT VOLTAGE

CODE	MODULE POWER	LUMINAIRE POWER
15-02-12-9-XX-H-RGB	11W	12W
15-02-25-9-XX-H-RGB	23W	25W

RGB ALL IN ONE

CODE	MODULE POWER	LUMINAIRE POWER
15-02-12-9-XX-D-RGB	11W	12W
15-02-25-9-XX-D-RGB	23W	25W

RGBW(A) CONSTANT VOLTAGE

CODE	MODULE POWER	LUMINAIRE POWER
15-02-12-9-XX-H-RGBW(A)	11W	12W
15-02-17-9-XX-H-RGBW(A)	16W	17W

RGBW(A) ALL IN ONE

CODE	MODULE POWER	LUMINAIRE POWER
15-02-12-9-XX-D-RGBW(A)	11W	12W
15-02-25-9-XX-D-RGBW(A)	23W	25W

XX : Lens Angle

USED POWER SUPPLY BRANDS





USED LED BRANDS



TITUS RGB / RGBW(A)

EN 60598 | IK09 | IP67 | CE

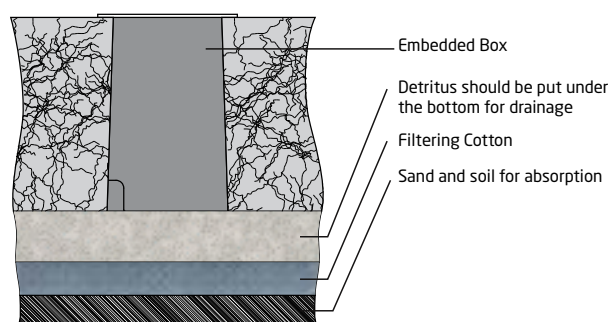


All in One



Constant Voltage



Photometric Curves

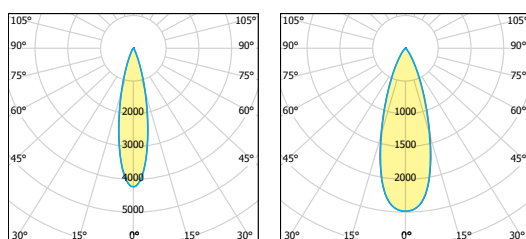

Technical Specifications

Inground made of aluminium die cast

Aluminium and stainless steel

Clear 6mm safety glass

Silicon base seal gasket

Mounting bracket made of plastic

Electrostatic powder coating

Lens angle 30°-50° (9 in 1 full lens)

Color standard 7040, optional RAL codes

Input: All in One = 110-240V AC, Constant Voltage = 12 V DC

Power factor (min.) 0.92

RGB PWM signal

DMX 512 (Standard)

Safety Class I

Protection Class IP67

Impact strength IK09

Operation temperature -25°C / +55°C

Weight: All in One = 2 kg, Constant Voltage = 1,25 kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

